

SZG Professional building glass manufacturer--EU standard 11.52mm curved tempered laminated glass

11.52mm curved toughened laminated glass made by 5mm tempered curved glass + 1.52mm PVB film + 5mm tempered glass.

Features:

- 1.Safety function: 11.52mm curved laminated tempered glass have both the functions of tempered glass and laminated glass, When it broken, the debris still stick to the film and won't fall off, the whole glass is still in complete shape to offer protection before replacement.
2. The hardness of curved tempered glass is 5 times than the annealed glass.
3. Curved tempered glass can withstand the temperature is 3 times the ordinary glass and can withstand 300 degrees Celsius temperature changes.

Specifications:

Other Thickness: 13.52mm curved laminated glass,17.52mm curved laminated glass,21.52mm curved laminated glass,25.52mm curved laminated glass,31.52mm curved laminated glass,39.52mm curved laminated glass etc

Customized size: Max: 3.3m*12m

Color: clear, ultra clear, acid etched, gray, green, blue, bronze or any color based on Pantone chart.

Applications:

Curved tempered laminated glass use widely in modern buildings, see as below:


- 1.Curved laminated glass wall
- 2.Curved laminated glass ceiling
- 3.Curved laminated glass Fence/ Railing/ Balustrade
- 4.Curved laminated glass partition
- 5.Curved laminated glass facade
- 6.Curved laminated glass elevator
7. Curved laminated glass shower screen

Quality:

1. 11.52mm toughened laminated glass meet BS 6206 UK safety glass standard.

2. 11.52mm toughened laminated glass meet EN 12150 CE European safety glass standard.
3. 11.52mm toughened laminated glass meet Chinese Safety Glass Compulsory Certification (CCC)
4. 11.52mm toughened laminated glass meet EN 14449 European safety glass standard.

Glass Picture:

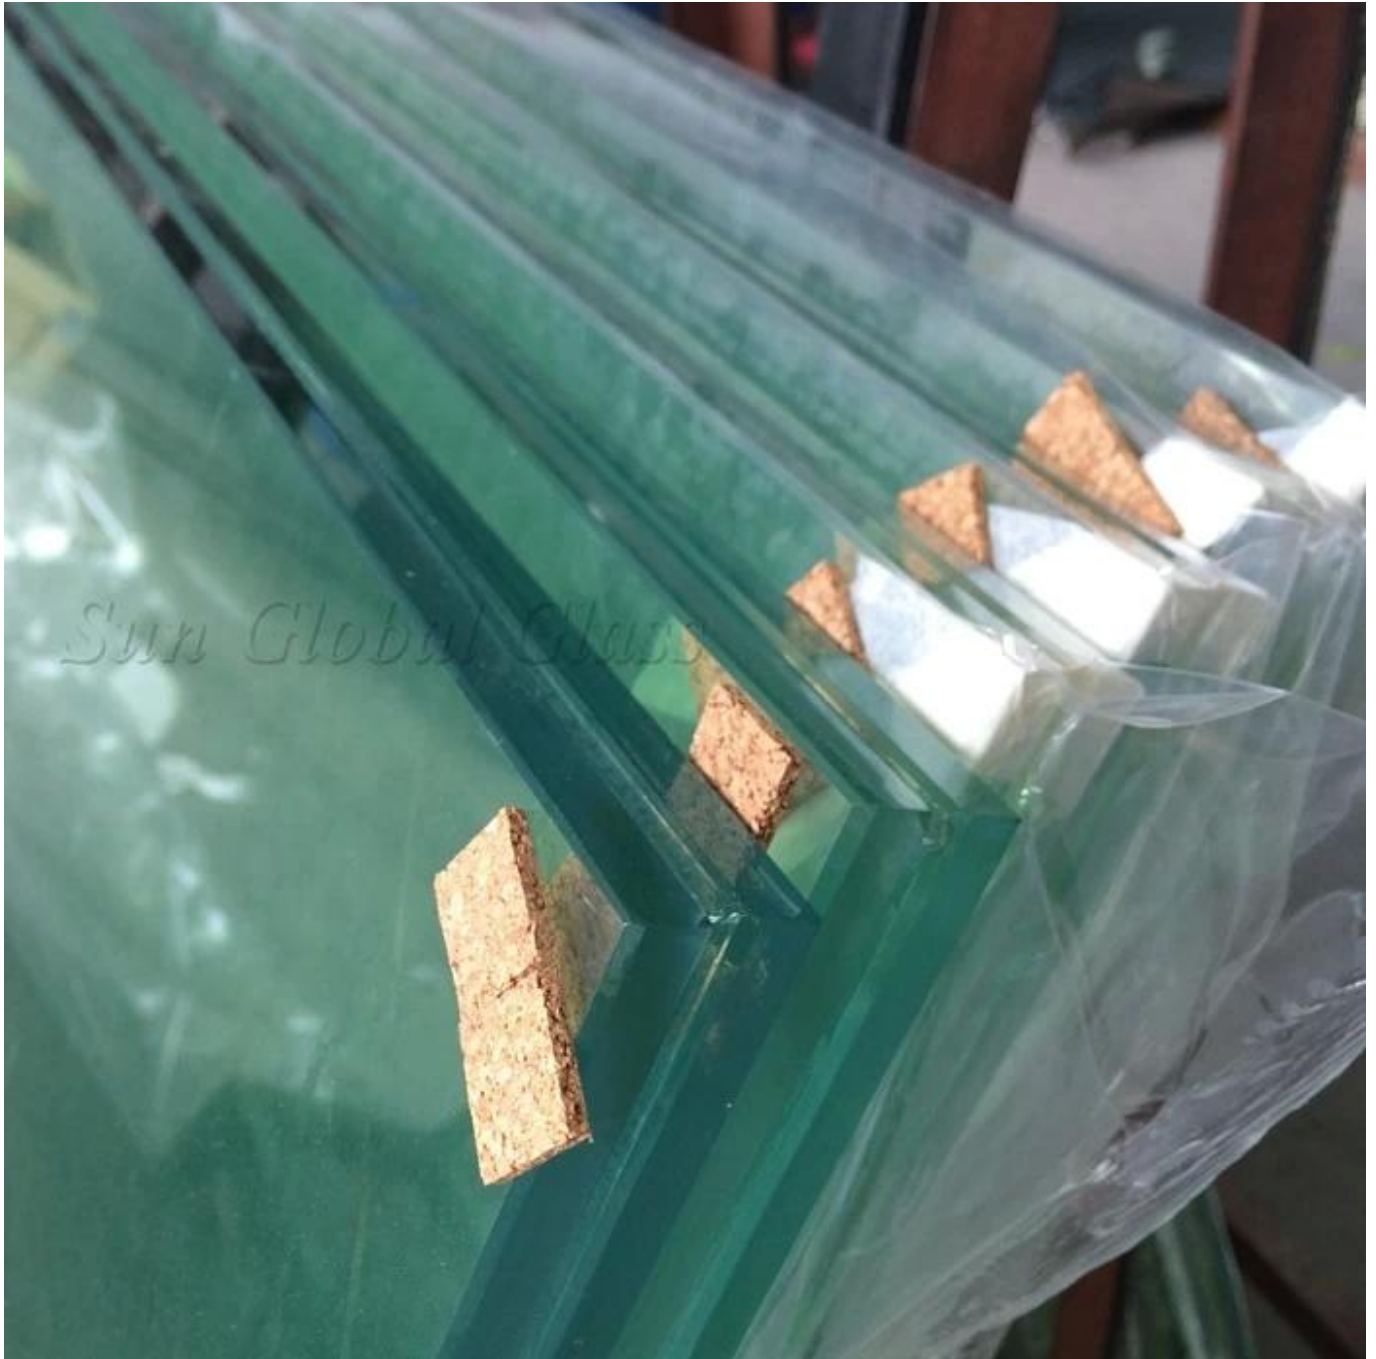

Production lines:



Package and Loading:



S Z G

Professional glass manufacturer

