

SZG-Glass Manufacturer-Building Glass-32.28mm Low Iron Tempered Laminated Glass

32.28mm low iron tempered laminated glass is combined by two pieces of 15mm low iron tempered glass (ultra clear tempered glass) laminated by 2.28mm clear PVB film. After heating and high pressure in the high-pressure autoclave, the bubbles the two pieces of glass panels are tightly glued together by the PVB film. 15mm ultra clear tempered glass is a type of safety glass with high strength. It can withstand a strong impact.

Notice:

All processes such as drilling holes, polishing edge, rounding corners, cutouts, cutting notches, etc. must be confirmed before production.




Images of 32.28mm ultra clear tempered laminated glass:





Sun Global Glass

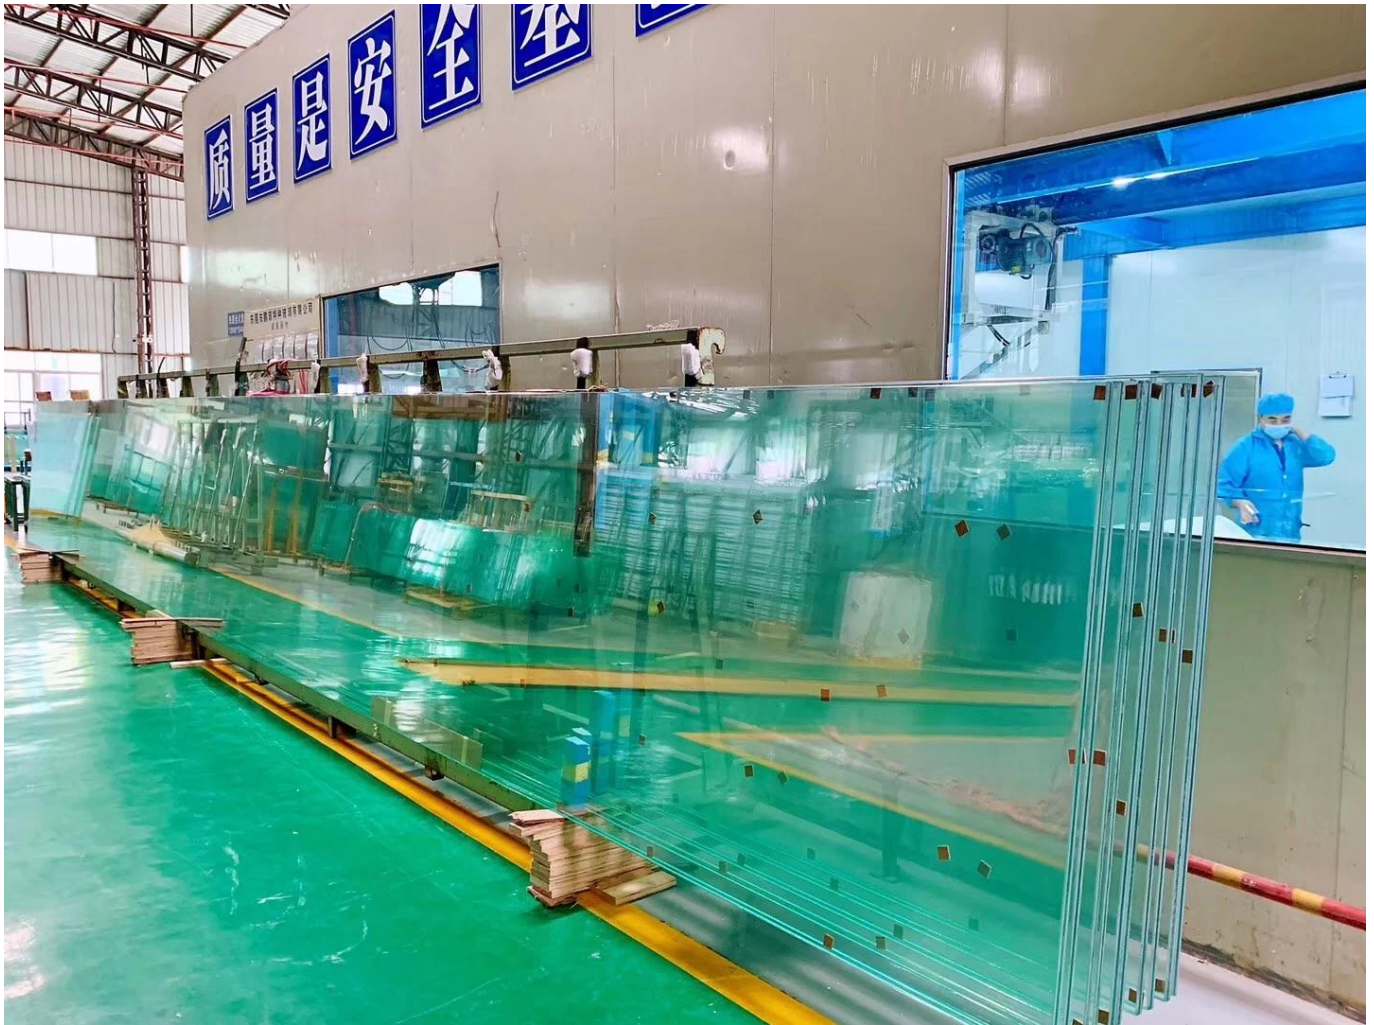

Advantages of low iron tempered laminated glass:

- 1.Security: The debris will still stick to the film and won't fall off when the laminated glass panel is broken.
- 2.High Strength: 15+15mm tempered laminated glass has same high strength as tempered glass. It's 4-5 times harder than 15+15mm non-tempered laminated glass.
- 3.High transparency, we can enjoy a clear view when we look through 32.28mm low iron laminated glass.
- 4.The ultra clear laminated glass can block parts of UV rays because of the PVB film.

Specifications:

Product description: 32.28mm low iron toughened laminated glass

Other descriptions: 15mm+15mm ultra clear ESG VSG, 15+15 low iron toughened laminated glass, 15+15 tempered sandwich glass, 15+15.6 tempered laminated glass, 15+2.28 PVB+15 laminated glass, 15+15 extra clear toughened and laminated glass, 15+15 double glazing, 15+15 super white tempered laminated

glass, etc..

Combinations: 15mm ultra clear tempered glass+ 2.28mm PVB+ 15mm ultra clear tempered glass

Maximum Size: 3.3M*12M (jumbo size)

Available colors of PVB interlayer : Any colors,such as euro grey, dark grey, blue, bronze, etc..

Delivery time: 7-15 days, urgent services are available.

Production equipment:



Quality standards:


The tempered laminated glass produced by Shenzhen Sun Global Glass CO., LTD is strictly in accordance with the requirements of the ISO 9001 quality management system certification and meets the following quality standards.

1. Chinese Safety Glass standard (CCC).
2. BS 6206 certificate of UK safety glass standard.
3. European safety glass standard: EN EN 14449 certificate (CE).
4. USA laminated safety glass standard: SGCC certificate.



Applications of 32.28mm low iron toughened laminated glass:

- 1.Railing, balustrade, balcony.
- 2.Curtain wall and facades.
- 3.Skylight, canopy.
- 4.Shop front glass,
- 5.Partitions.
- 6.Flooring, staircases.

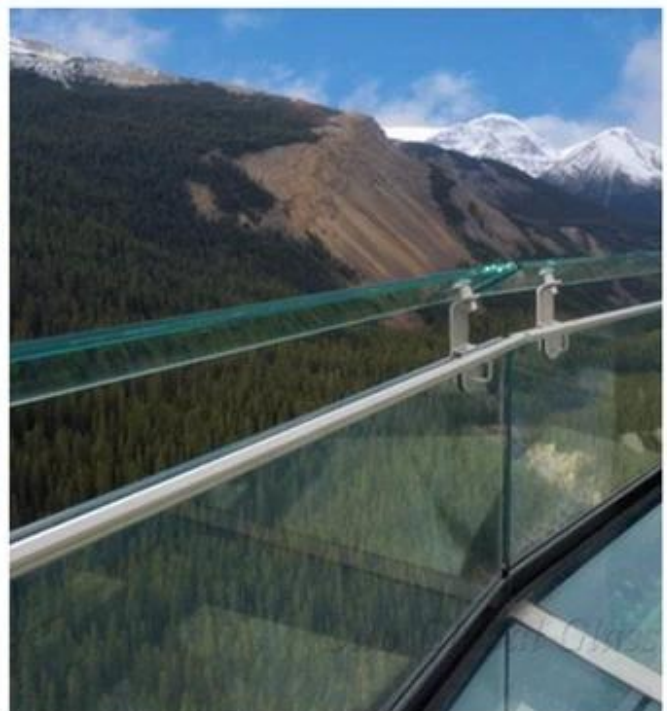

Other types of laminated glass you may be interested in:

Clear laminated glass;

Colored laminated glass;

Curved laminated glass;

Printing laminated glass;

Wire mesh laminated glass, etc..