

SGG 17.52mm tempered laminated glass supplier and manufacturer in China

17.52mm toughened laminated glass is consisting of two panes of [8mm toughened glass](#) and interlayered by 1.52mm PVB or SGP, which is a kind of film that adhesive, elasticity and high resistance. Glass and film bonded together, then compressed in autoclave. With the process of lamination, the glass is super strong and high protective against glass breakage.

Features:

1. Security: 17.52mm toughened laminated glass is high strength, protect people from serious injury against broken glass, meanwhile against violent inbreaking attempts. Because the glass fragments will not fall down to the ground, but stuck onto the film as a whole pieces, stay still before the replacement ready.

2. Sound Proof: The PVB or SGP film has a different density with glass panes, stop the sound transmission. A standard insulated window with one layer of laminated glass would have a sound transmission class of around 32-35, highly improved sound controlling from an ordinary window without laminated glass.

3. UV rays reduction: toughened laminated glass reduces the penetration of UV rays that is harmful to people and objects inside of the house, like furnitures.

4. Fire resistance: The correspondingly configured toughened laminated glass protects against fire or bombardment.

5. Energy saving: toughened laminated glass let light through at the same time reduce heat transmissiön. Specially it was consisted with a reflective glass or low emissivity glass.

6. Decoration: glass panes are classic material, but the different interlayers are real eye-catchers. We can produce toughened laminated glass with silk, metal, feathers, grass, transparent, semi-transparent or opaque films, even printing pictures.

Applications:

1. Glass roof
2. [Glass railings](#)
3. Glass fence
4. Glass facade
5. Glass floor
6. Glass staircase
7. Glass elevator
8. Glass canopy
9. Shopfront glass
10. other glazing applications need security like bank, airport, shopping malls, jewelry counters.....

Specifications:

Maximum size: 8000 mm length

Thickness range: 4mm to 65mm thickness

Color range: transparent, semi-transparent, opaque colors and designs

Details processing:

17.52mm toughened laminated glass can be processed accurately with polished edges, safety corner, drilling holes, cut outs to assemble with different types of accessories.

Quality Certificates:

1. Chinese standard ISO and GB15763.3
2. Europe standard EN12543, E12510
3. North American standard ANSI Z97.1

Picture details of 17.52mm tempered laminated glass:

Product image:



Breakage of toughened laminated glass:



annealed glass




tempered glass



tempered laminated glass

Production Line:

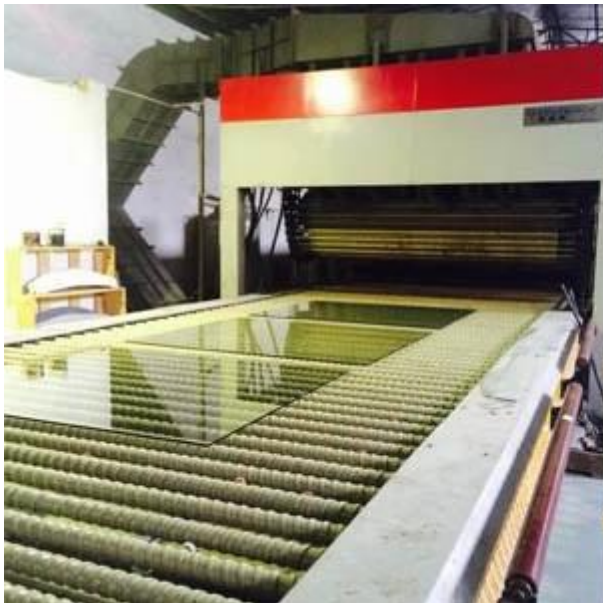



Package:





Other popular thickness:

- 8.76mm toughened laminated glass
- 13.52mm toughened laminated glass
- 21.52mm toughened laminated glass