### SGG 6mm+15A spacer+6mm low e insulated glass

# -SOUND PROOF GLASS & HEAT INSULATION GLASS & SOLAR ENERGY SAVING GLASS BUILDING MATERIAL

31mm low e Insulated Glass is made by 6mm low e glass and 6mm tempered glass sheets and and bonded with 15mm aluminum frame ,the air space can be filled with air or argon, each edge of IGU(insulated glass units) sealed with high strength sealants that can perfectly avoid vapor water penetrated, the most of advantages of insulated glass is reduce thermal losses, lower energy consumption, with the high efficient energy saving and thermal remain, it can save a lot home application consumption. The insulated glass is a kind of solar energy glass and use widely in modern buildings.

### Specification of insulated glass:

Glass thickness: 16mm insulated glass,18mm insulated glass,19mm insulated glass,21mm insulated glass,22mm insulated glass,24mm insulated glass,25mm insulated glass,26mm insulated glass,28mm insulated glass,39mm insulated glass,40mm insulate

Spacer thickness: 6A insulated glass,9A insulated glass,12A insulated glass,15A insulated glass,20A insulated glass

Gas: Air gas insulated glass, Argon gas insulated glass

Min size: 200x200mm

Max size: 3300x12000mm

Bicomponent (structural seal and PIB) for secondary sealant

#### **Length or width tolerance (mm):**

 $L/W < 1000 \pm 2.0$ 

 $1000 \le L/W < 2000 + 2. -3$ 

L/W ≥2000 ±3.0

#### Thickness tolerance (mm):

T<17 ±1.0

17≤T<22 ±1.5


 $T>22 \pm 2.0$ 

#### Types of insulated glass:

1.float insulated glass, mostly use as glass window
2.Tempered insulated glass
3.Reflective insulated glass
4.Low e insulated glass
Features of low e insulated glass:
1.Low e insulated glass have very good energy saving effect. In order to make the effect of energy better, people can make the window opening bigger.
2.Low e insulated glass have rich color and good artistic performance.
3.Low e insulated glass can improve indoor environment. Hollow glass can intercept the sun and prevent the heat caused by radiation discomfort and reduce sunset sun caused dizziness.
Application:
Insulated glass use widely in architecture, see as below:
1.Glass window and glass door, glass partition
2.Glass curtain wall,glass facade,glass wall
3.Glass railing,glass balustrade,glass fence etc
Quality:
Our insulated glass are produced strictly follow the quality system ISO9001 and meet following standards:
1. CCC standard(Chinese Safety Glass Compulsory Certification)
2. China Insulated glass quality standard GB11944
3. European safety glass quality standard EN12150

### **Product Details:**

### **Product pictures of 31mm low e insulated glass:**

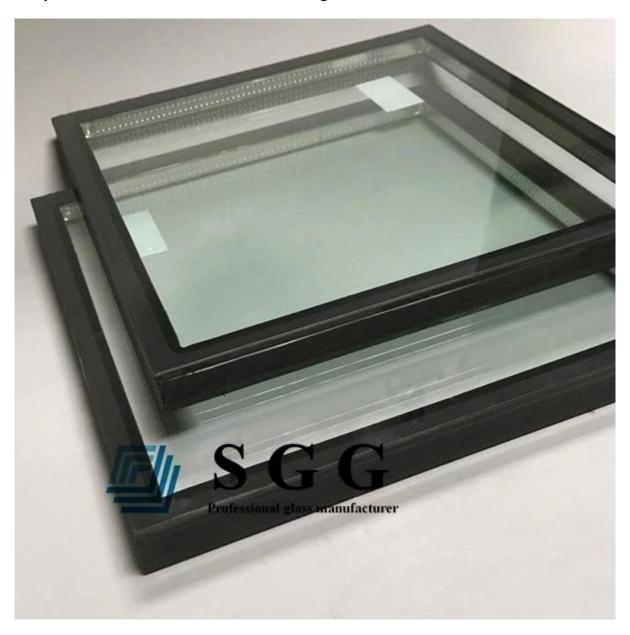





low e insulated glass performance:

Single 2#	Thickness	可见光Visible Light			阳光Solar Energy					
		LT%	LR	%	投射率	反射率	UV透射率%	U值	太阳得热系数	遮阳 系数
Monolithic	mm	Transmi ttance	Outside	Inside	Transmi ttance	Reflectan ce	TUV	U Value	SHGC	sc
Clear glass +12mm spcaer + SGG LOW- E GLASS Same Thickness, 2#	3	75	17	18	59	15	45	1.9	0.65	0.75
	4	74	16	17	56	14	42	1.9	0.63	0.73
	5	74	17	17	55	14	41	1.9	0.63	0.73
	6	73	16	17	52	13	37	1.8	0.62	0.71
	8	71	15	16	47	12	32	1.8	0.58	0.67
	10	69	15	16	43	12	29	1.8	0.56	0.64
	12	68	15	16	39	10	28	1.9	0.54	0.62

# **Production Line:**



# Package and Loading:





Our promise is that you receiving 6mm+15A+6mm low e insulated glass with high quality and safety condition from us.