

6mm fire resistance tempered glass--Advanced in fire-rated glazings


Fire resistant glass can slow the spread of high heat and flames for a specific period of time through partition walls or curtain walls. During a fire, stress caused by uneven heating on regular annealed glass results in quick breakage. Fire-rated glass is engineered to be insensitive to high temperatures and is tested to meet a specific minute ratings that quantify how long it can withstand breakage during a fire. Fire glass is typically rated between 30 and 180 minutes. A well-selected integration of fire rated glass can effectively contain the effect of fire, with the result of great protection for building inhabitants during an evacuation and less structural damage.

Types of fire rated glass:

1. Single layer fire rated glass(C grade fire glass)

Thickness: 5mm 6mm 8mm 10mm 12mm 15mm

Fire proof time: 30mins to 120 mins

|  S Z G Professional glass manufacturer | | | | |
|---|--------------------|------------------------|-----------------|---------------------------------|
| SZG Single Layer Fire Resistance Glass | | | | |
| Thickness | Performance | Fire Proof Time (Mins) | Weight (KG/SQM) | Fire Resistant Temperature (°C) |
| 5 | Class C Fire Glass | 30;60 | 12.5 | ≥1000 |
| 6 | Class C Fire Glass | 30;60;90 | 15 | ≥1000 |
| 8 | Class C Fire Glass | 30;60;90 | 20 | ≥1000 |
| 10 | Class C Fire Glass | 30;60;90 | 25 | ≥1000 |
| 12 | Class C Fire Glass | 30;60;90;120 | 30 | ≥1000 |
| 15 | Class C Fire Glass | 30;60;90;120 | 37.5 | ≥1000 |
| For reference only | | | | |

2. Double layer fire rated glass(A grade fire glass)

Thickness: 16mm 20mm 26mm 30mm 36mm 60mm

Fire insulation time: 30min to 180 mins

**S Z G**

Professional glass manufacturer


SZG Double Layer Fire Resistance Glass

| Thickness | Performance | Fire Insulation Max Time(Mins) | Weight (KG/SQM) | Fire Side Temperature(°C) | Opposit Fire Side Temperature(°C) | Sound Insulation (DB) |
|-----------|------------------------|--------------------------------|-----------------|---------------------------|-----------------------------------|-----------------------|
| 60±2.0 | A3.00 super Grade | 180 | ≈80 | 1113 | < 129 | ≈60 |
| 36±2.0 | A2.00 I Grade | 120 | ≈55 | 1060 | < 140 | ≈60 |
| 30±1.5 | A1.50 I Grade | 90 | ≈50 | 1017 | < 120 | ≈55 |
| 26±1.5 | A1.50 I Grade(A CLASS) | 60; 90 | ≈45 | 1017 | < 120 | ≈55 |
| 20±1.3 | A1.00 I Grade(B CLASS) | 45; 60 | ≈35 | 939 | < 100 | ≈35 |
| 16±1.0 | A0.50 IV Grade | 30; 46 | ≈30 | 920 | < 140 | ≈35 |

For reference only

6MM Monolithic Fireproof Glass Features:

- 1.Fire resistant time: 30 minutes, 60 minutes, 90 minutes minutes.
- 2.Can withstand up to 1000°C flame with a specific time, to keep glass complete, not broken or enclosure.
- 3.6MM fire rated tempered glass, not only has good performance on fire resistant, but also has all advantage for 6mm tempered glass, even higher than 6mm toughened glass. Such as: the hardness, 6mm fireproof glass is 2-3 times than **6mm tempered glass**, and 6-12 times than **6mm float glass**.
- 4.When the 6mm fire rated glass broken, its fragment is small cube, that can max reduce the harmful to human being.
- 5.6mm monolithic fire proof glass are customized orders, can be ordered by standard size.
- 6.Processing services: drill holes, cut out, cut notches, polished edges, etc,same features with tempered glass, can not process after finish.

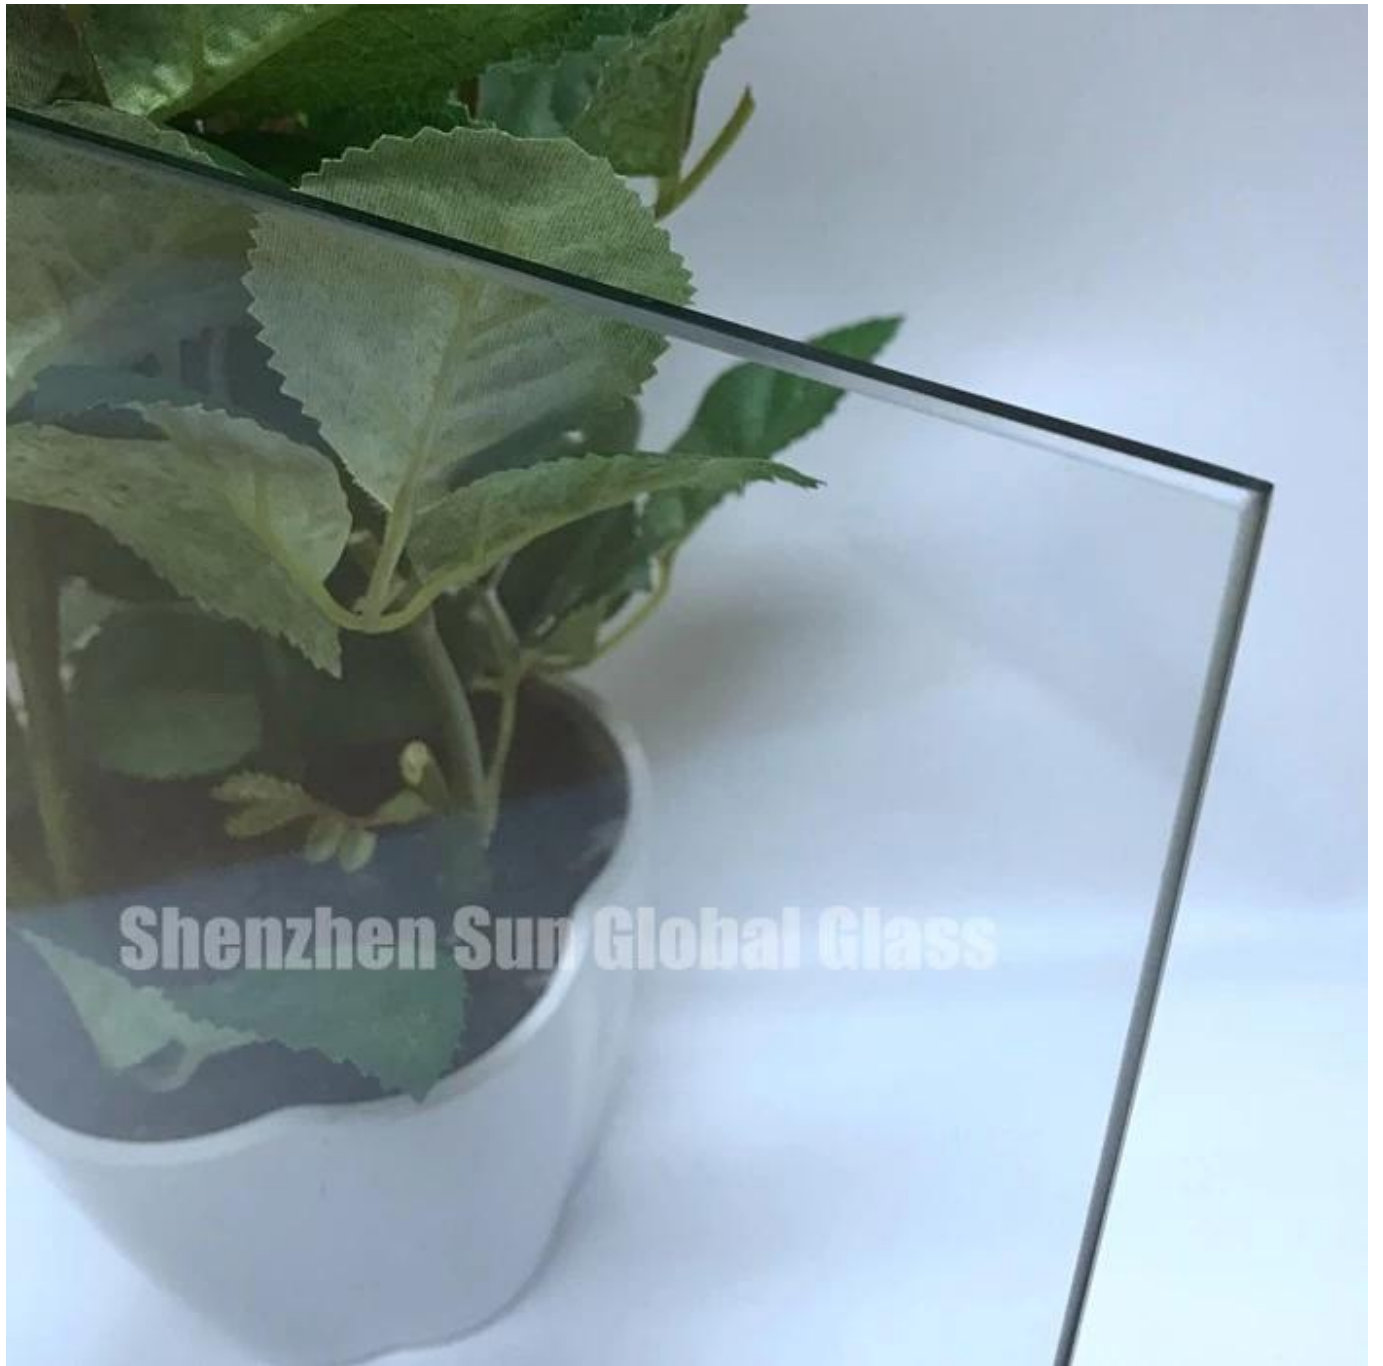

Shenzhen Sun Global Glass



Glass Application:

6mm Fire rated glass can be applied to glass doors, glass windows, glass partitions on schools, hospitals, shopping malls, hotels, and other public places.

How it works:

