

SGG 10 + 10 mm SGP SGP

10 + 10 mm SGP SGP 2 **10 mm** SentryGlas SGP
SGP SGP SGP
SGP SGP

1.

1. SGP: SGP SGP Low-E glass SGP

2. SGP: 0.89 mm 1.52 mm 2.28 mm

3. SGP: Du Pont SGP

4. SGP: 6000 mm SGP

5. SGP: 2500 mm SGP

6. SGP

PVB SGP SGP

Material Performance	SGP	PVB
Tensile Strength MPA	34.5	28.1
Tear Strength MJ/m3	50	10-15
Fracture Expansion Rate	400%	275%
Haze Degree	<<2%	<2%
Yellow Index	<1.5	6-12
Index of Refraction	1.5	1.47~1.5
Transmittance 6mm Clear+1.52mm+6mm Clear	89%	89%
UV Resistance Rate 3mm Clear+0.38mm+6mm Clear	99.9%	99.9%
Ignition Point	470°C	410°C
Flame Spread Index	30	60
Combustion Smoke Index	215	350

1.

1. 100 SG P 5
2. 100 SG P 100
3. 100 SG P
4. 100 SG
5. 100 SG
- 6.

SGP

SGP SGP


- 1.
- 2.
- 3.
- 4.
- 5.

:

1. 10 + 10 mm SG ISO9001 CCC
2. 10 + 10 mm SG EN12543 E12510
3. 10 + 10 mm SG BS6206

10 + 10 mm SGP


:

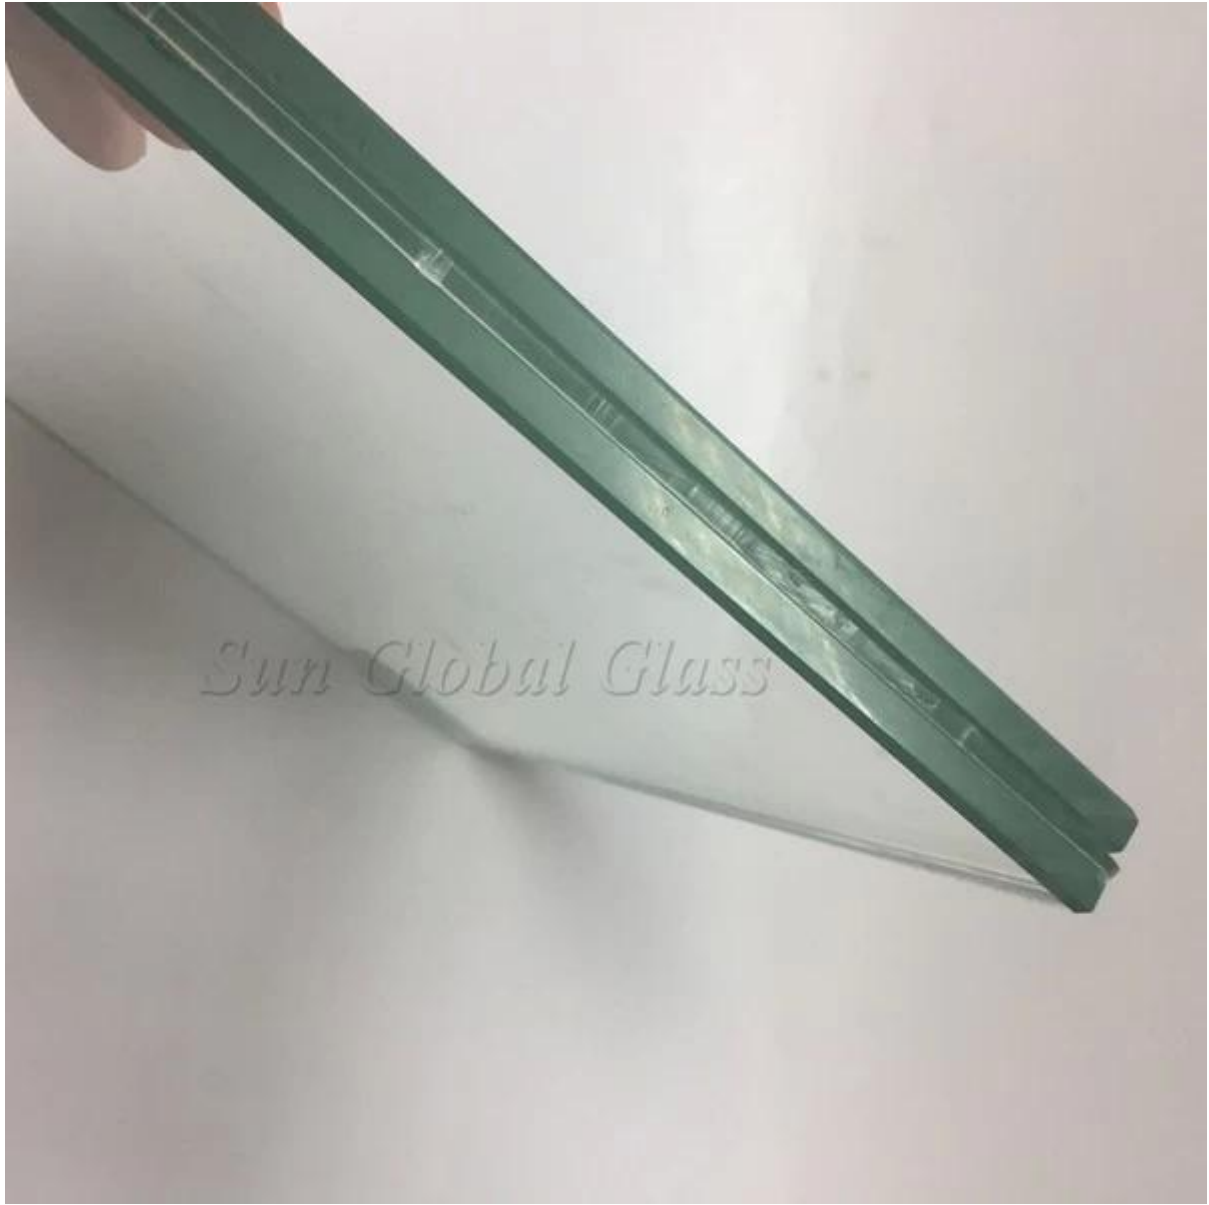

PVB ████████████████████ ████████████████████ **SGP:**



12mm Laminated Glass with SGP Interlayer

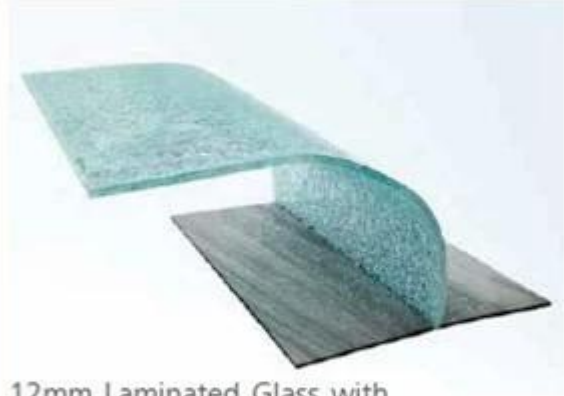


12mm Laminated Glass with PVB Interlayer

Sun Global Glass



12mm Tempered Glass

□□□□:

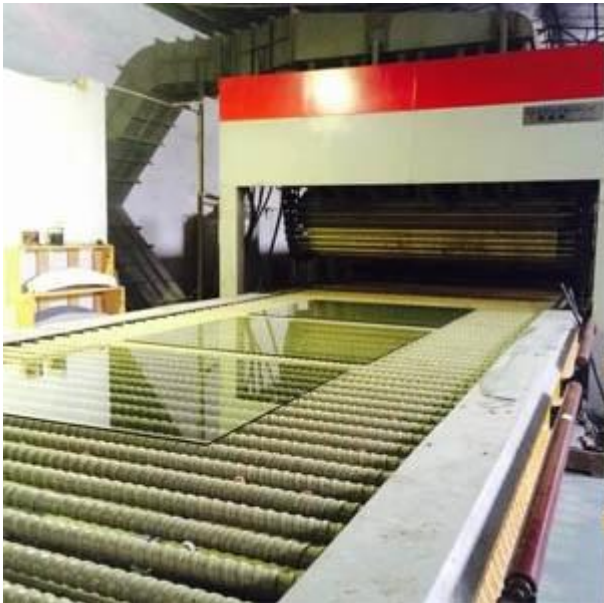



□□□□:



