

# 10 mm

10mm A 288°C 316°C 550°F 600°F 28


1 5

2 9% 3%

3

10mm

4 mm 5 mm 6 mm 8 mm 10 mm 12 mm 15 mm 19 mm

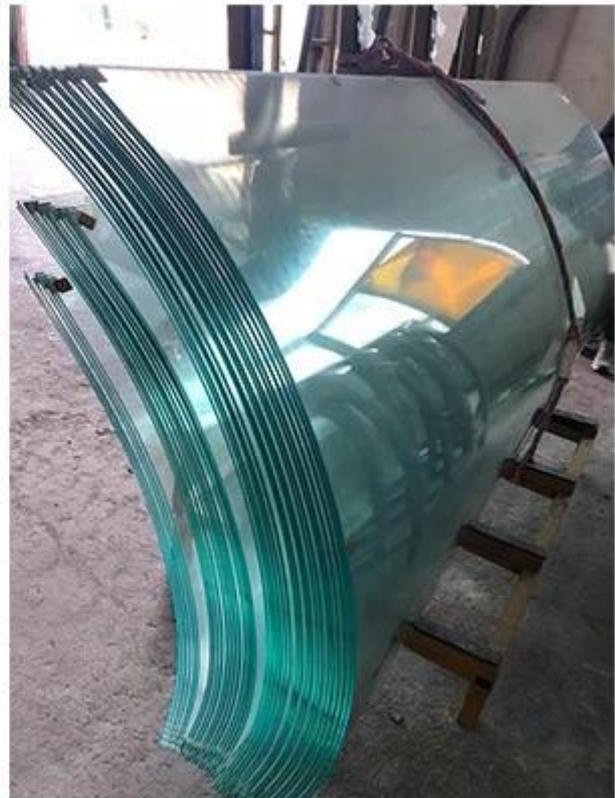





cut out



water jat



driling machine



edge polish



tempered glass



heat soak machine



product come out



packing



packing complete

ISO CCC CE BS6206 EN12510

