


2. performance
30-45°C

- 1.
- 2.
- 3.
4. Glass
- 5.
- 6.

1. 12mm BS 6206
2. 12mm EN 12150
3. 12 mm CCC

12 mm

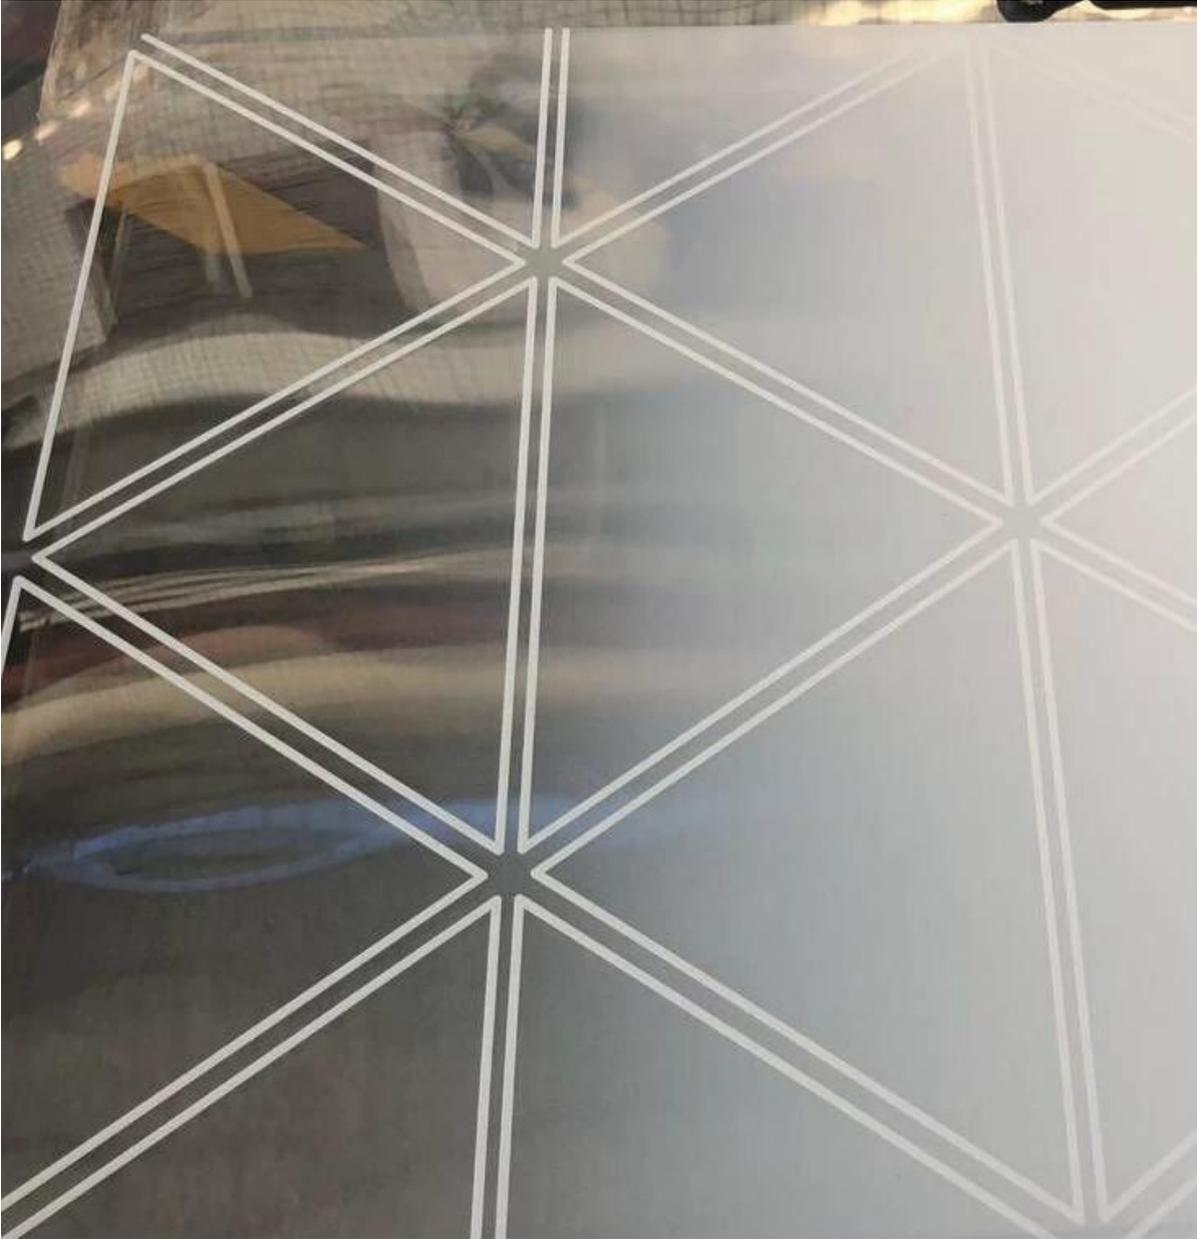

□□□□□



□□□□□□□□

