sgg 12mm [illegible] [illegible]

12 mm [illegible] [illegible], [illegible], [illegible], [illegible].[illegible]

[illegible]:

1.12 [illegible]12[illegible]4-5 [illegible]

2. [illegible]

3. [illegible]

4. 220 ℃[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

-[illegible]/[illegible]/chamfer [illegible]/[illegible]/[illegible]

[illegible]:

[illegible]

-[illegible]

-[illegible]

-[illegible]

-[illegible]

[illegible]?

[illegible]-

□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□

□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□

□□□□□:

SGG
Professional glass manufacturer

□□□□□□□□□□□□:

SGG
Professional glass manufacturer

□□□□□
□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□ secious □□□

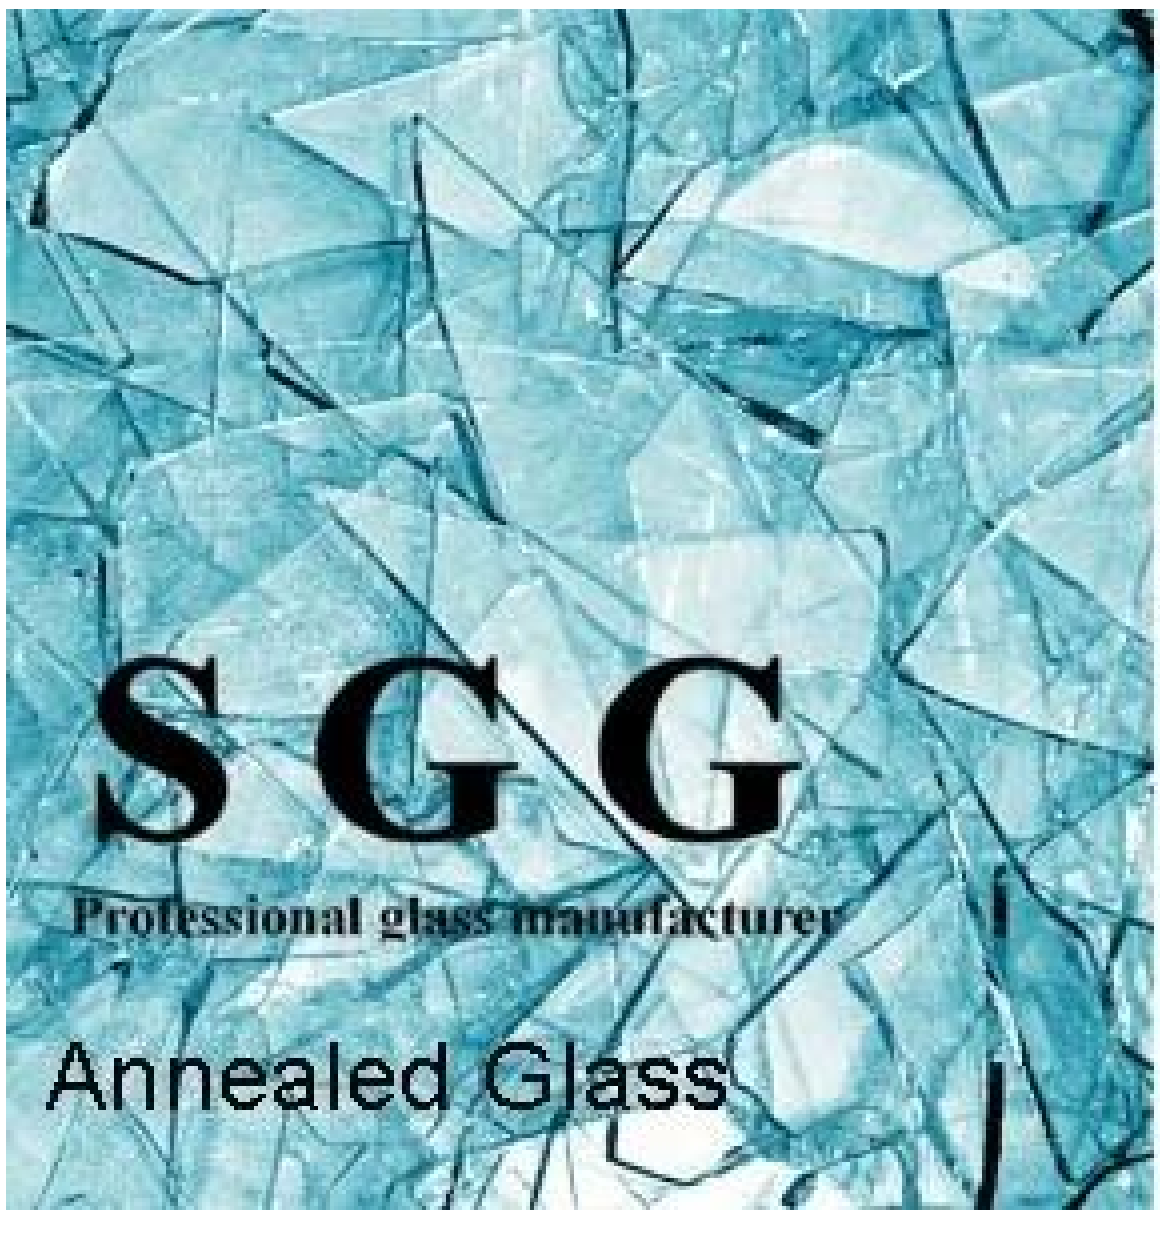
SGG
Professional glass manufacturer
Annealed Glass

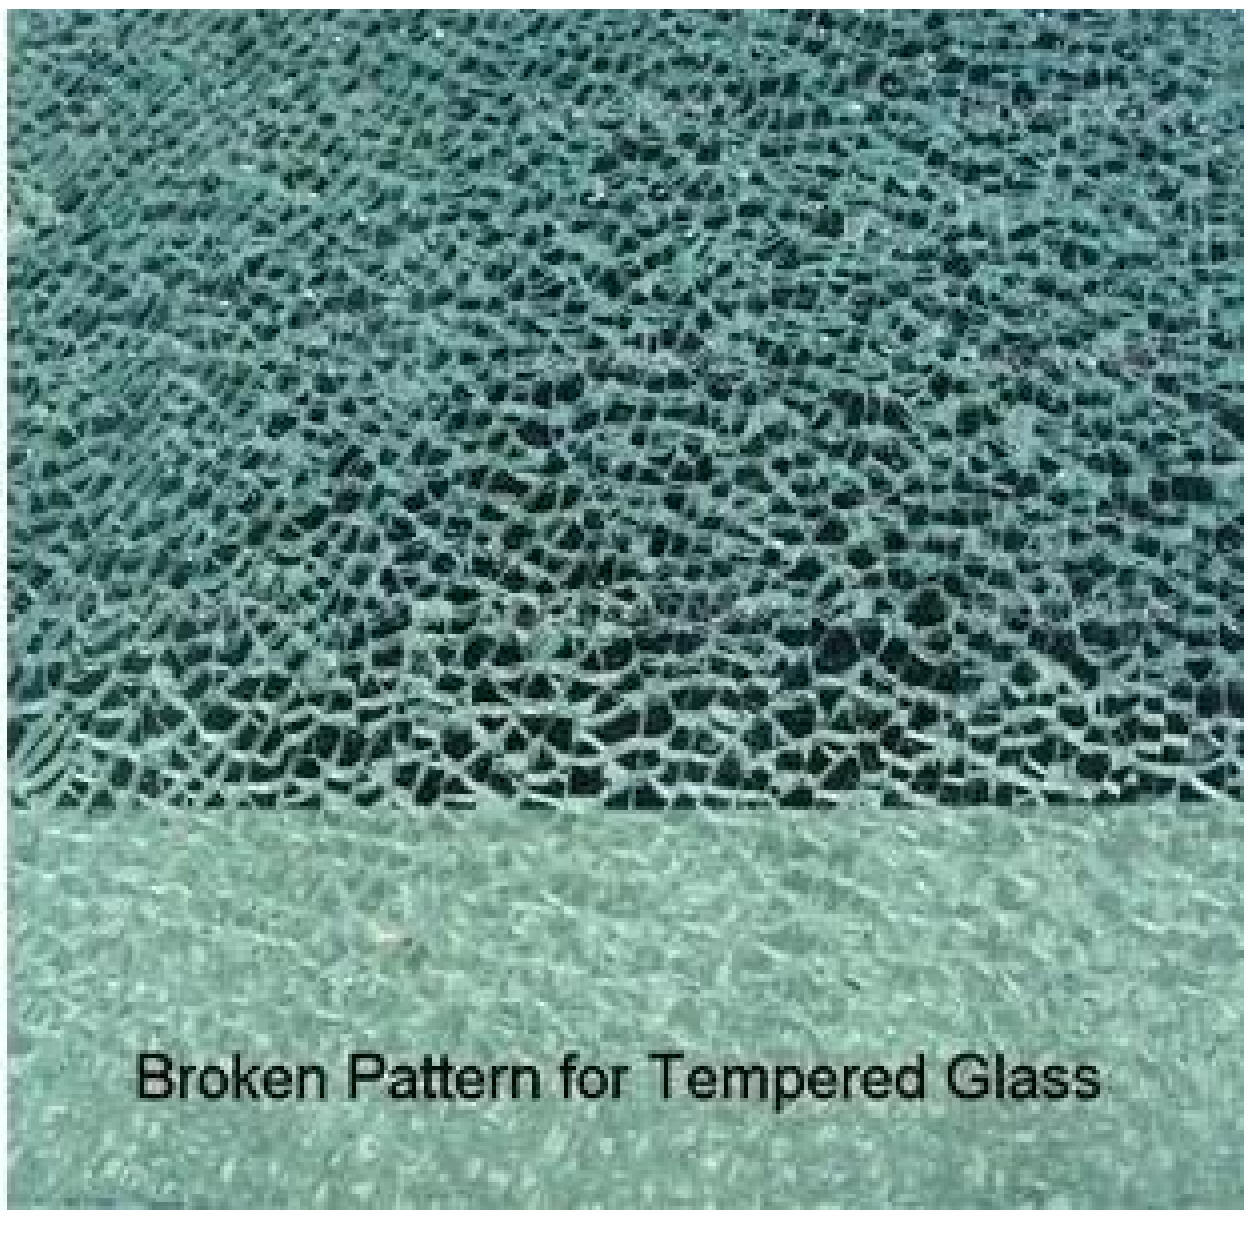
Broken Pattern for Tempered Glass

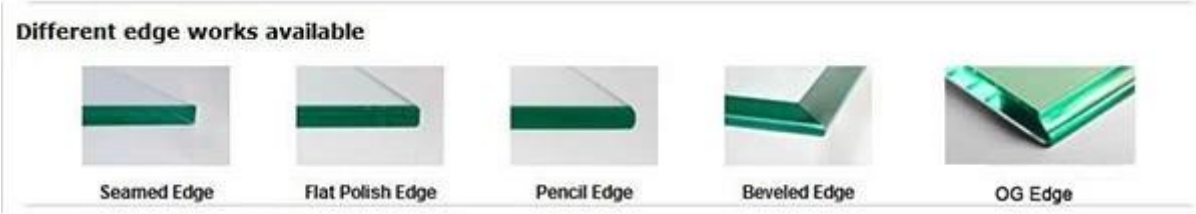
Different edge works available
Seamed Edge
Flat Polish Edge
Pencil Edge
Beveled Edge
OG Edge

□□□□□□□□□□□□□□□□□□□□□□□□□□□□:

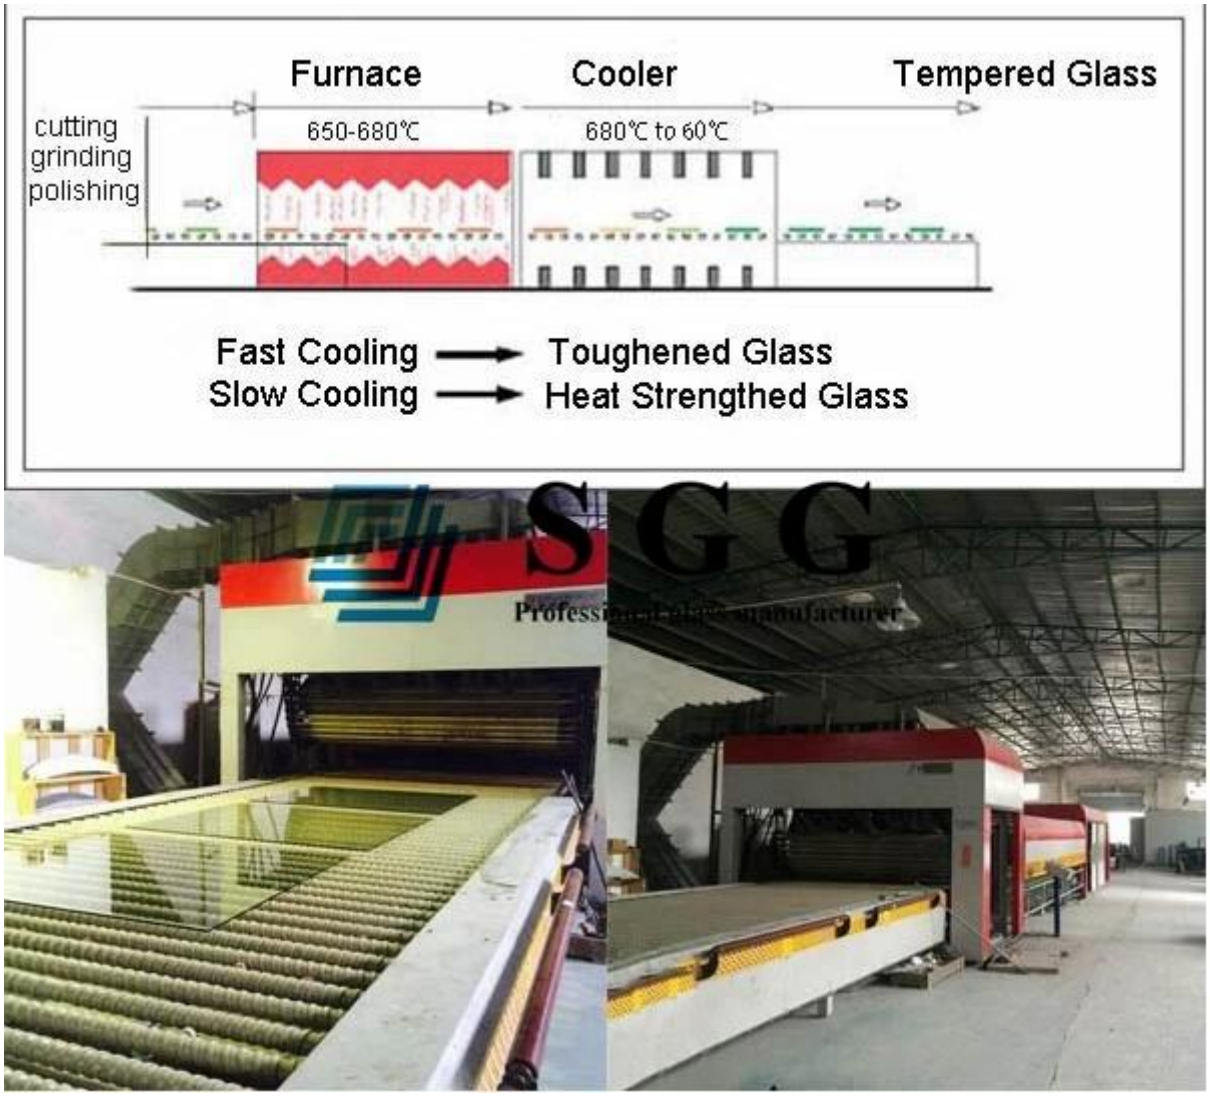
Furnace
Cooler
Tempered Glass
cutting
grinding
polishing
650-680℃
680℃ to 60℃
Fast Cooling → Toughened Glass
Slow Cooling → Heat Strengthed Glass
SGG

Pakcage □□□□□□□□:

SGG
Professional glass manufacturer