

SZG - - 13.52mmSGP

13.52mm SGP 13.52mm PVB 2 6mm 1.52mmSGP 6mmSGP 13.52mmSGP 13.52mm PVBSGP

13.52mmSGP 6mm + 6mm SGP13.52mm6mm + 6mm6mm + 6mmSGP13.52mm13.52mmSGPSGP Saflex SOLUTIA Du Pont 6mm + 1.52mm SGP + 6mm 4mm + 0.89 SGP + 4mm5mm + 0.89 SGP + 5mm8mm + 1.52 SGP + 8mm 10mm + 1.52 SGP + 10mm15mm + 2.28mm + 15mm 0.89mm1.52mm2.28mm 3300M * 12M

- 13.52mm SGP**
- 1. SGP13.52mm13.52mm PVB13.52mm EVA
 - 2. SGP
 - 3.SGP
 - 4.SGP
 - 5. SGP
 - 6.SafetySGP
 - 7.Sound13.52SGP
 - 8.SGP


PVBSGP

Material Performance	SGP	PVB
Tensile Strength MPA	34.5	28.1
Tear Strength MJ/m ³	50	10-15
Fracture Expansion Rate	400%	275%
Haze Degree	<<2%	<2%
Yellow Index	<1.5	6-12
Index of Refraction	1.5	1.47~1.5
Transmittance 6mm Clear+1.52mm+6mm Clear	89%	89%
UV Resistance Rate 3mm Clear+0.38mm+6mm Clear	99.9%	99.9%
Ignition Point	470℃	410℃
Flame Spread Index	30	60
Combustion Smoke Index	215	350


☐☐☐☐☐☐☐☐☐☐PVB☐☐☐☐☐☐☐☐& SGP☐☐☐☐☐☐☐☐☐☐



12mm Laminated Glass with
SGP Interlayer

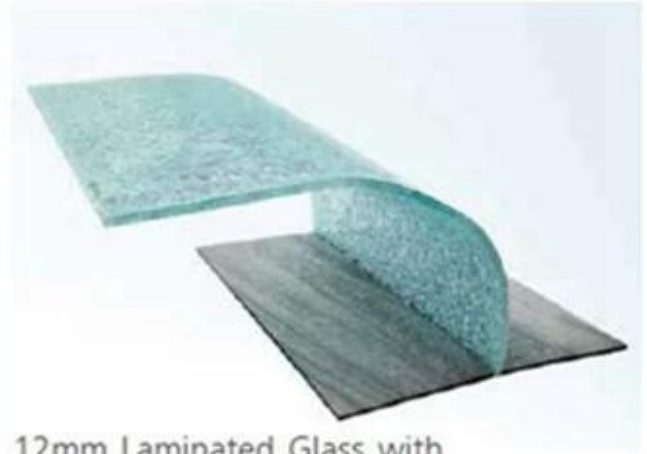

12mm Laminated Glass with
PVB Interlayer

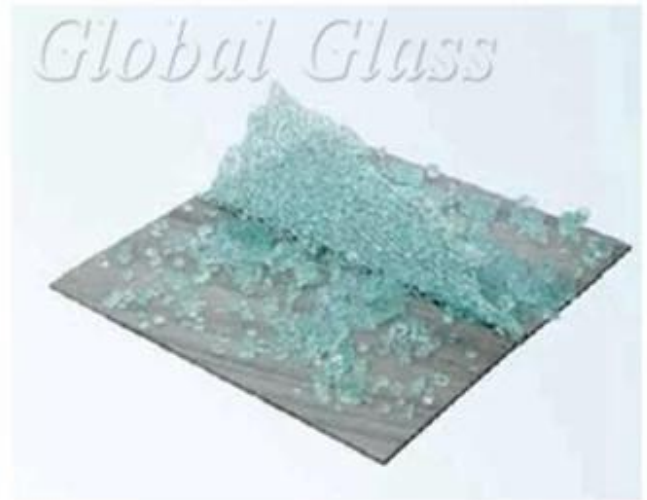

12mm Tempered Glass

□□□□□□







13.52 SGP

- [illegible]



S Z G

Professional glass manufacturer

□□□□□

- 1.□□□□□□□□ - □□□□□CCC□□ISO 9001□
- 2.□□□□□□□□□ - BS 6206□□
- 3.□□□□□□□□□□□□ - EN 12150 CE□□□□

□□□□□□



S Z G

Professional glass manufacturer



□□□□□□&□□□□□□



S Z G

Professional glass manufacturer