


**SZG 8 mm + 0.89 mm SGP + 8 mm** -

16.89 SGP 2 8mm SGP PVB EVA SGP



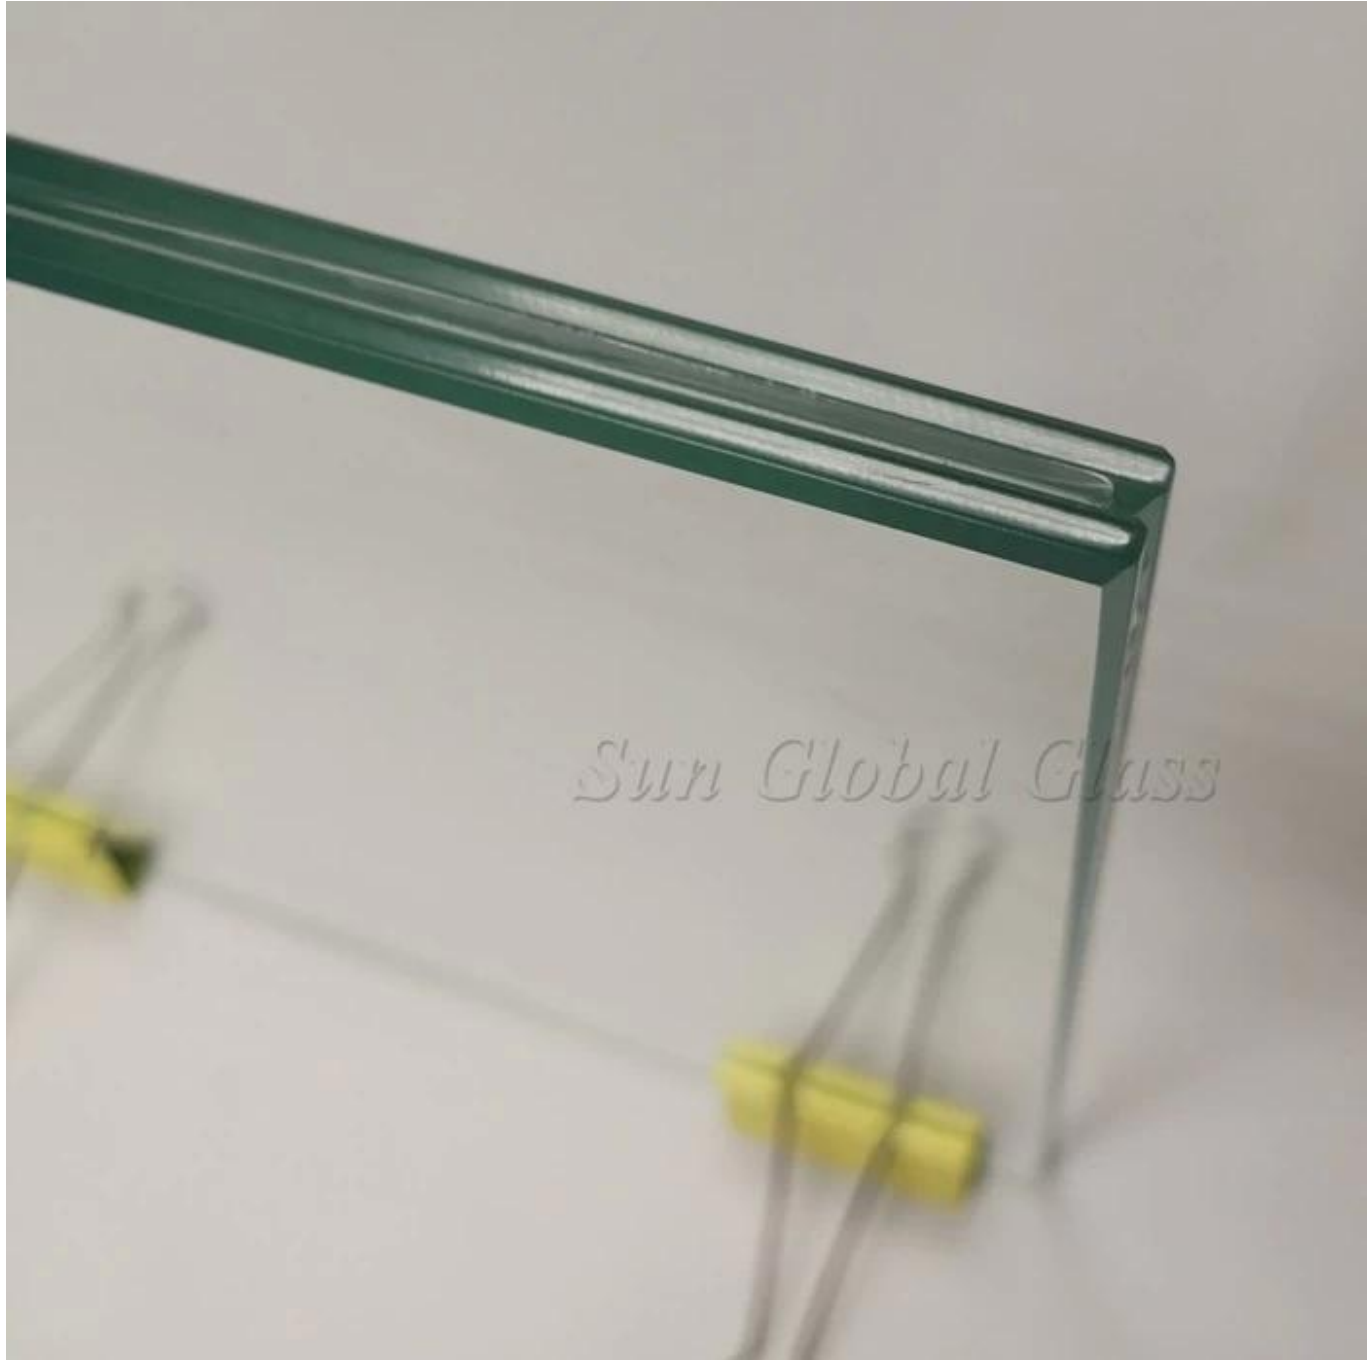

SGP DuPont Saflex SOLUTIA

6000\* 2500



000

sgp 1. The PVB 5 sgp PVB 100

SGP

3. Sgp

4.

5. sgp

6.

Material Performance	SGP	PVB
Tensile Strength MPA	34.5	28.1
Tear Strength MJ/m3	50	10-15
Fracture Expansion Rate	400%	275%
Haze Degree	<<2%	<2%
Yellow Index	<1.5	6-12
Index of Refraction	1.5	1.47~1.5
Transmittance 6mm Clear+1.52mm+6mm Clear	89%	89%
UV Resistance Rate 3mm Clear+0.38mm+6mm Clear	99.9%	99.9%
Ignition Point	470°C	410°C
Flame Spread Index	30	60
Combustion Smoke Index	215	350

# SGP

SGP  
SGP

1.



3. 16.89mm SGP 16.89mm SGP BS6206

4. 16.89mm SGP 16.89mm SGP GB9962 GB15763.2



