

28.76mm 玻璃单元 IGU 玻璃单元 10.76mm 玻璃单元 1 6mm 玻璃单元 12mm 玻璃单元

SZG 玻璃单元 PVB 玻璃单元

玻璃单元 玻璃单元





□□□□□□□□□□□□□□□□



Insulated Glass



Insulated Laminated Glass



Laminated Insulated Glass



Double Laminated Insulated Glass



Triple Insulated Glass



Triple Laminated Insulated Glass

SZ


1. SZG 28.76 mm SZG PVB PVB

2. Low e low e low E

3. 3300mmx13000mm




heat strengthened glass

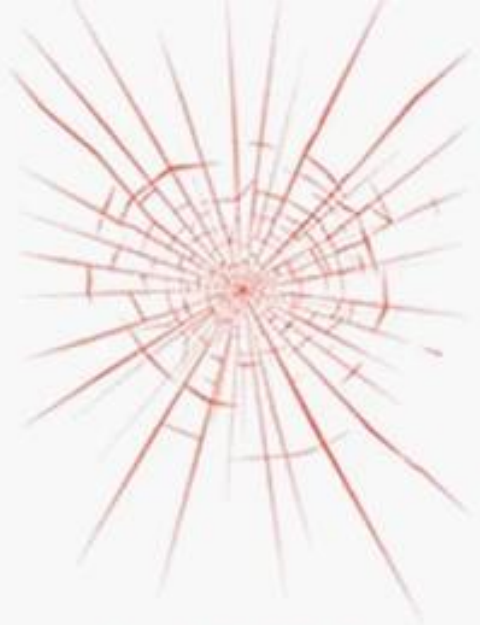

laminated glass



In Summer, low E coating can reduce the harmful UV rays and solar heat gain.

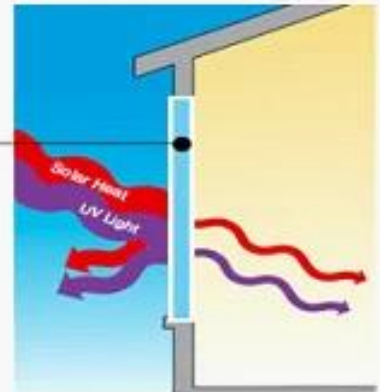

In winter, low E coating can retain interior heat to maintain a comfortable temperature



SZG 玻璃有限公司

1. 玻璃有限公司 PVB 玻璃有限公司

2. 钢化玻璃的抗冲击性能符合GB 9631-2008标准，冲击强度≥69MPa，抗弯强度≥24MPa，抗拉强度≥69MPa。

3. 钢化玻璃的夹层玻璃符合GB 15763.2-2005标准，PVB夹层厚度≥8mm。

钢化玻璃的抗冲击性能符合GB 9631-2008标准，冲击强度≥69MPa，抗弯强度≥24MPa，抗拉强度≥69MPa。



S Z G

Professional glass manufacturer

