


3.2 mm

1500° c

1100° c 600° c tin

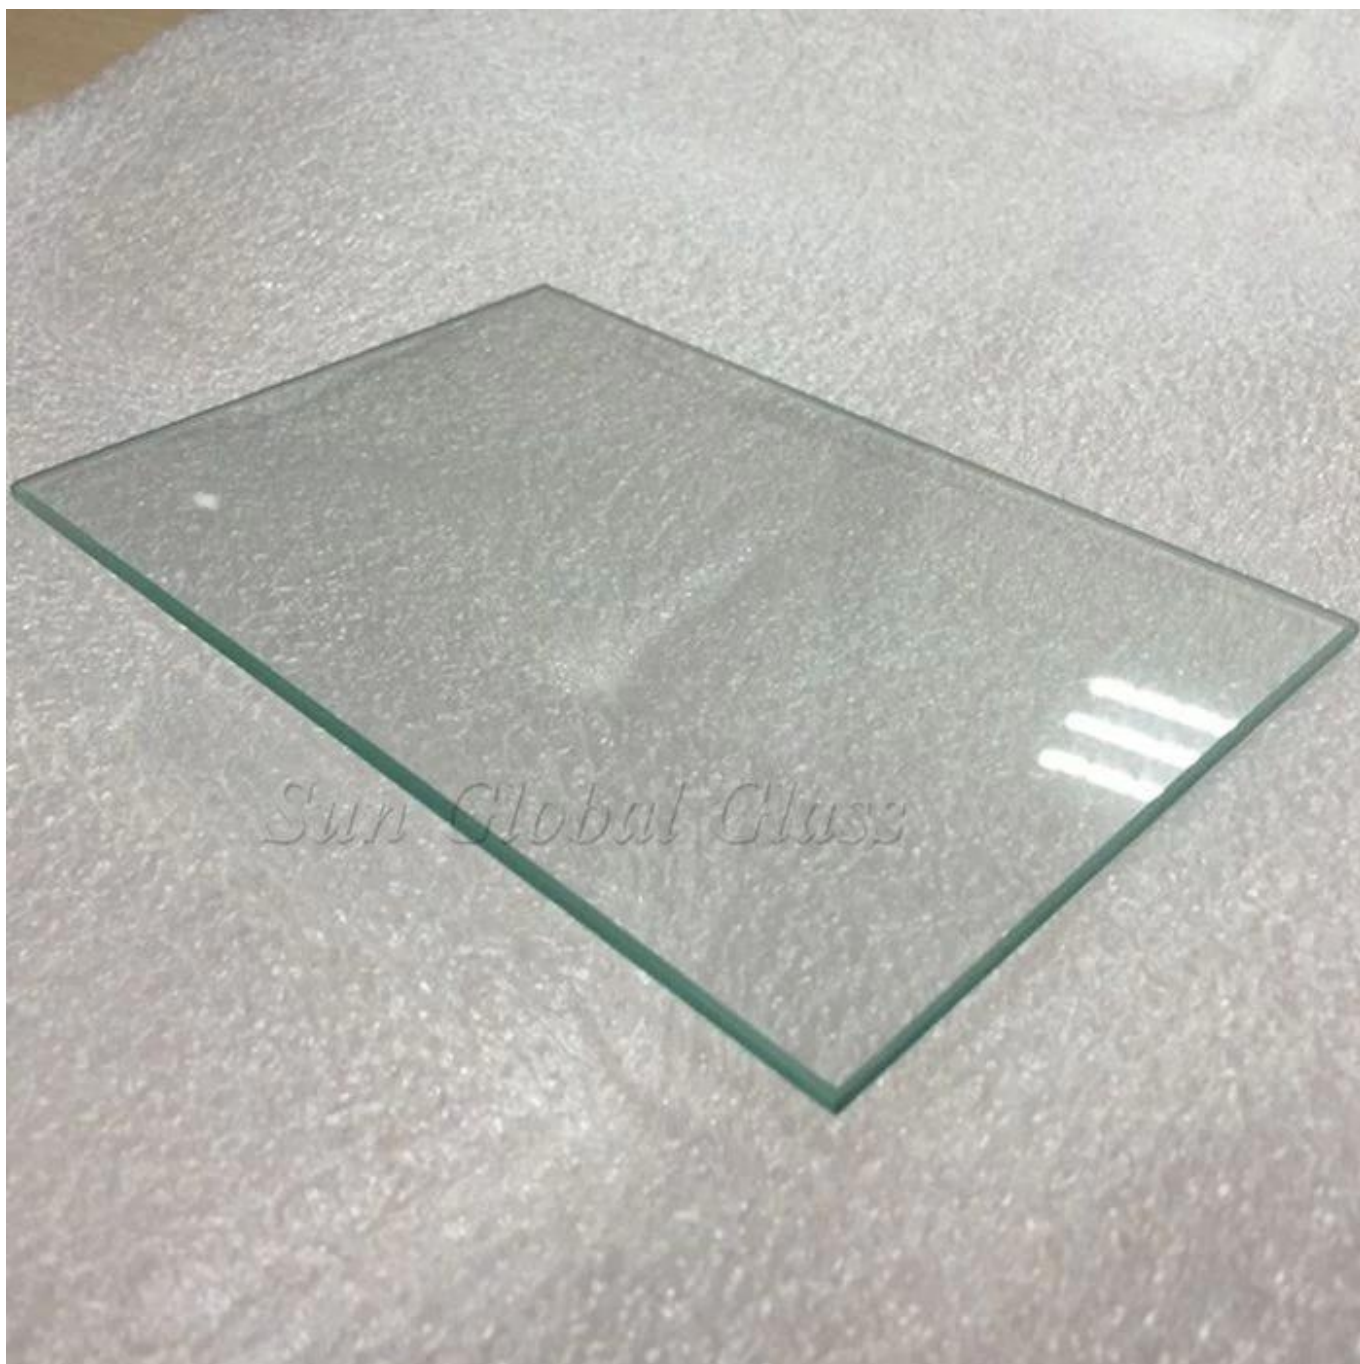

SZG Clear Float Glass Parameter

NO	Product Name	Visible Infrared Transmittance	Visible Light Transmittance	Visible Reflectivity	Solar Energy Transmittance	Solar Energy Reflectivity	Total Solar energy transmittance
1	2mm clear float glass	84.15	90.69	7.45	87.55	7.9	88.93
2	2.5mm clear float glass	82.31	90.47	7.45	87.20	7.8	87.22
3	2.8mm clear float glass	81.22	90.34	7.26	86.91	7.7	86.14
4	3mm clear float glass	80.51	90.30	7.26	86.56	7.7	85.09
5	3.2mm clear float glass	79.8	90.27	7.26	85.01	7.7	84.67
6	4mm clear float glass	77.03	90.17	7.50	85.46	7.6	83.04
7	5mm clear float glass	73.71	89.83	7.05	83.96	7.4	81.07
8	6mm clear float glass	70.54	89.34	7.36	82.73	7.3	79.17
9	8mm clear float glass	66.14	88.64	7.11	79.66	7.1	76.51
10	10mm clear float glass	56.19	87.52	7.09	76.67	6.9	73.61
11	12mm clear float glass	61.59	87.27	6.73	75.06	6.6	70.98
12	15mm clear float glass	51.59	86.30	7.58	71.81	6.42	69.53
13	19mm clear float glass	47.91	84.99	/	67.93	/	/

□□:



 **SZG**
Professional glass manufacturer



□□□□□□□□□□□□



 **S Z G**

Professional glass manufacturer

