
000000 **SGG 5 mm** 0000 00000 000:


- 1. □□ 5 mm □□□□□□
- 2.0000000000000100000

Standard Orientation

Dot Patterns

The dot pattern starts at the base dimension and runs off the edges of the glass. Partial dots/holes are acceptable with standard dot pattern orientation.





Line Patterns

The dot pattern is vertical or horizontal and starts with either a line or space.






Note - When a line pattern is specified, answers to the following questions should be included in the specification:

- 1) Will the lines be vertical or horizontal?
- 2) Which edge will the pattern start on?
- 3) Will the pattern start with a line or space?

Design - Plus Orientation - A Viraspan Design pattern with requirements beyond standard orientation.

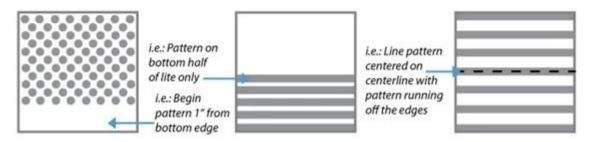


1" VE1-85 Insulating Silk-screen

1/4" (6mm) clear VE-85 and 50% coverage, V175 White #2 1/2" (13.2mm) airspace 1/4" (6mm) clear



1" VE1-85 Insulating Silk-screen

1/4" (6mm) clear VE-85 #2 1/2" (13.2mm) airspace 1/4" (6mm) clear with 50% coverage, V175 White #3



0.42

$5~\mathrm{MM}$ and announced considering 1 announced 1



- 5. 00000
- 6. SGG _______

5 MM 00000 00000 000000:

- 0000000

- 000 0000 000
- 000000000
- 0000
- 000000 000

- 1. 5 mm 000 0000000000 BS 6206 00000000000000000