

# SGG 8 + 8 MM LOW E INSULATED GLASS-UNIT & INSULATED GLASS UNIT

SGG 8 + 8 MM LOW E INSULATED GLASS-UNIT & INSULATED GLASS UNIT is a high performance glass unit designed for energy efficiency and sound insulation. It consists of two 8 mm low-e glass panes separated by a 16 mm air gap, with a warm edge spacer and argon gas fill. The unit is available in various sizes and configurations to meet your specific requirements.

Key features:

SGG 8 + 8 MM LOW E INSULATED GLASS-UNIT & INSULATED GLASS UNIT is available in various sizes and configurations. The glass panes are available in 6 mm, 9 mm, 12 mm, 15 mm, and 20 mm thicknesses. Sun Global Glass is a leading manufacturer of high performance glass units, offering a wide range of products and services.

- 1. Max: 2700x3700mm
- 2. Min: 180x350mm
- 3. Available in various configurations

Thickness	5 + 5 mm 6 + 6 mm 8 + 8 mm 10 + 10 mm
Low-e coating	6A 9 A 12 A 15 A 20 A
Spacer	Warm edge spacer
Gas fill	Argon gas fill
Dimensions	1. Max: 2700x3700mm 2. Min: 180x350mm 3. Available in various configurations
Configuration	1. Low-e glass + Low e tempered glass 2. Low-e glass + glass 3. Glass + glass 4. Available in various configurations

Key features:

SGG 8 + 8 MM LOW E INSULATED GLASS-UNIT & INSULATED GLASS UNIT is a high performance glass unit designed for energy efficiency and sound insulation. It consists of two 8 mm low-e glass panes separated by a 16 mm air gap, with a warm edge spacer and argon gas fill. The unit is available in various sizes and configurations to meet your specific requirements.

- 1. Available in various configurations
- 2. Available in various configurations
- 3. Available in various configurations
- 4. Available in various configurations

5

:


1.   
 2.

:

ISO CCC CE BS6206 EN12510 ANSI Z97

:

**LOW E INSULATED 8 + 8 MM**

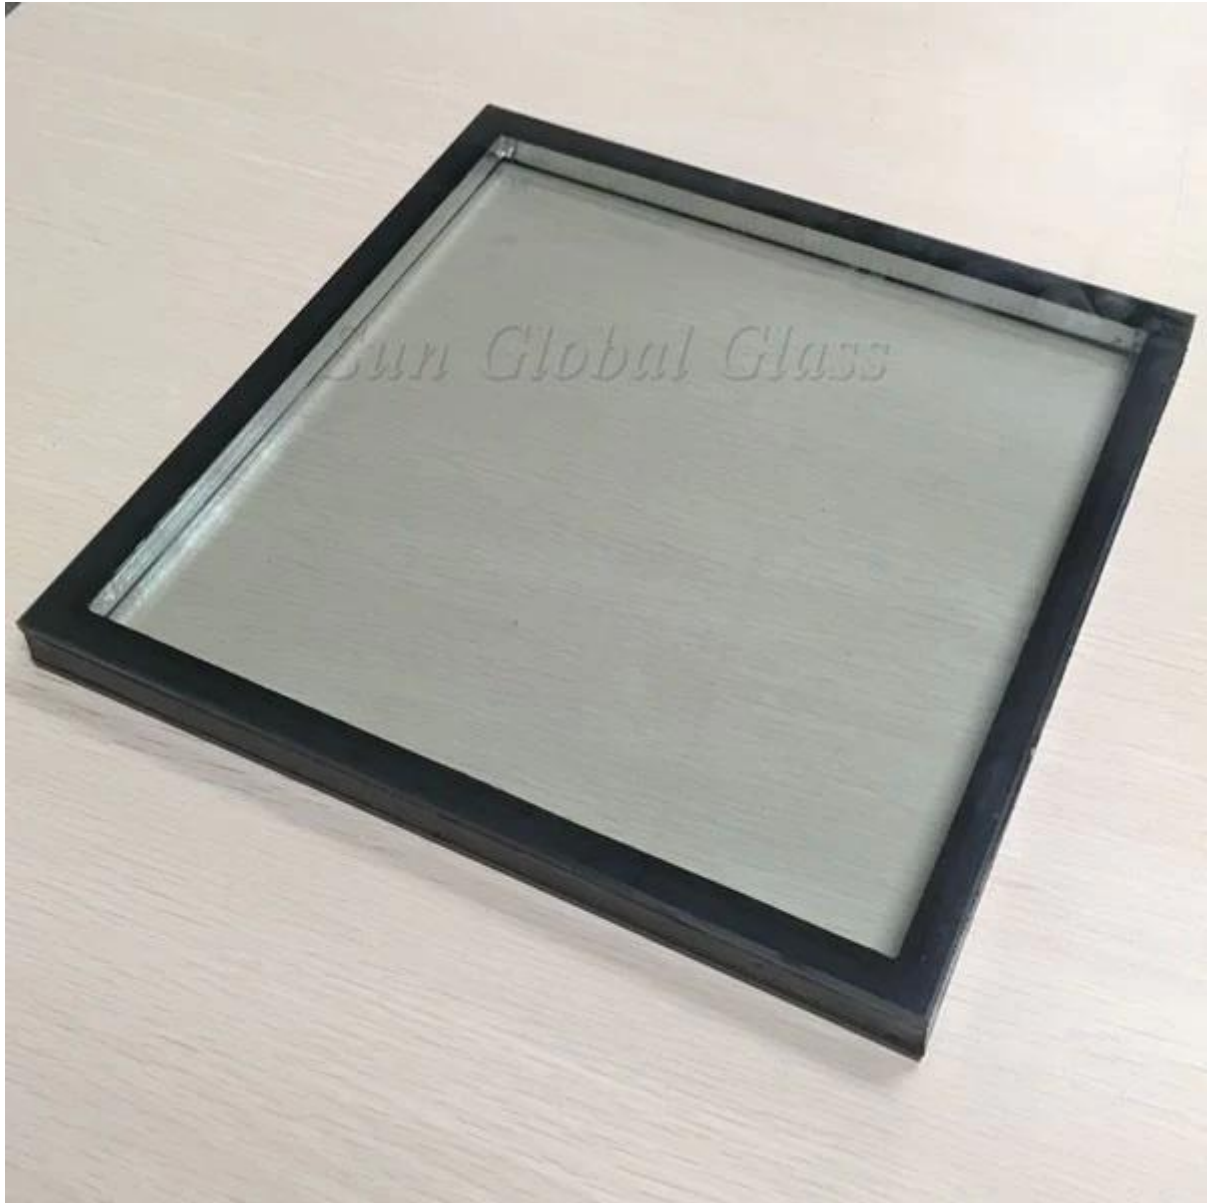

**low e insulated** □□□□□□:

SGG ONLINE LOW-E IGU GLASS DATA										
Single 2 #	Thickness	可见光Visible Light			阳光Solar Energy			U值	太阳得热系数	遮阳系数
		LT%	LR%		投射率 %	反射率 %	UV透射率%			
			Transmittance	Outside						
Monolithic	mm	Transmittance	Outside	Inside	Transmittance	Reflectance	TUV	U Value	SHGC	SC
Clear glass +12mm spacer + SGG LOW-E GLASS Same Thickness, 2#	3	75	17	18	59	15	45	1.9	0.65	0.75
	4	74	16	17	56	14	42	1.9	0.63	0.73
	5	74	17	17	55	14	41	1.9	0.63	0.73
	6	73	16	17	52	13	37	1.8	0.62	0.71
	8	71	15	16	47	12	32	1.8	0.58	0.67
	10	69	15	16	43	12	29	1.8	0.56	0.64
	12	68	15	16	39	10	28	1.9	0.54	0.62

□□□□:



□□□□□□□□:





□□□□□□□□□□:



Philippines  
AVIDA TOWERS  
in 2015



8 + 8 MM LOW E INSULATED