## 

- 7. 000000: 0000000 + low e tempered 000/000000/000000

□□:

- 1. 00000 00

\_\_\_\_\_: ISO9001\_CCC\_CE\_BS6206\_EN12510\_ANSI Z97\_




Low e insulated [[[[[]]]]]:

Single 2#	Thickness	可见光Visible Light			阳光Solar Energy					
		LT%	LR%		投射率	反射率		U值	太阳得热系数	遮阳 系数
					%	%	UV透射率%	1,052,000	535.5553	
Monolithic	mm	Transmi ttance	Outside	Inside	Transmi ttance	Reflectan ce	TUV	U Value	SHGC	sc
Clear glass +12mm	3	75	17	18	59	15	45	1.9	0.65	0.75
	4	74	16	17	56	14	42	1.9	0.63	0.73
spcaer +	5	74	17	17	55	14	41	1.9	0.63	0.73
SGG LOW- E GLASS	6	73	16	17	52	13	37	1.8	0.62	0.71
Same	8	71	15	16	47	12	32	1.8	0.58	0.67
Thickness, 2#	10	69	15	16	43	12	29	1.8	0.56	0.64
	12	68	15	16	39	10	28	1.9	0.54	0.62

## \_\_\_\_\_**:**



000000001:

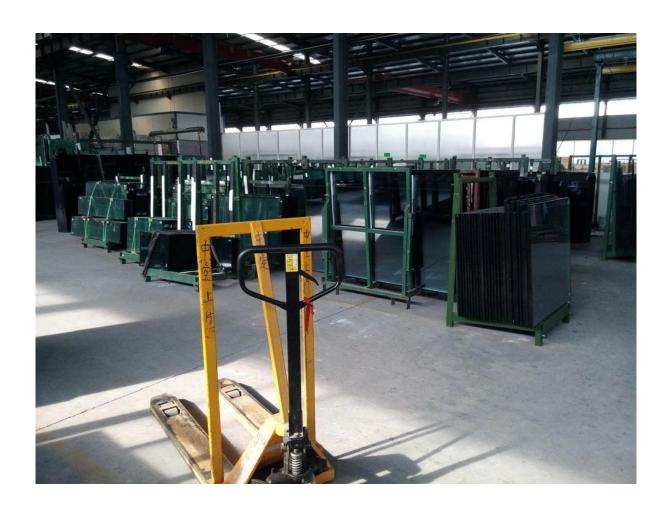



## 



