

SZG12mm_______**CE**___**SGCC**_____





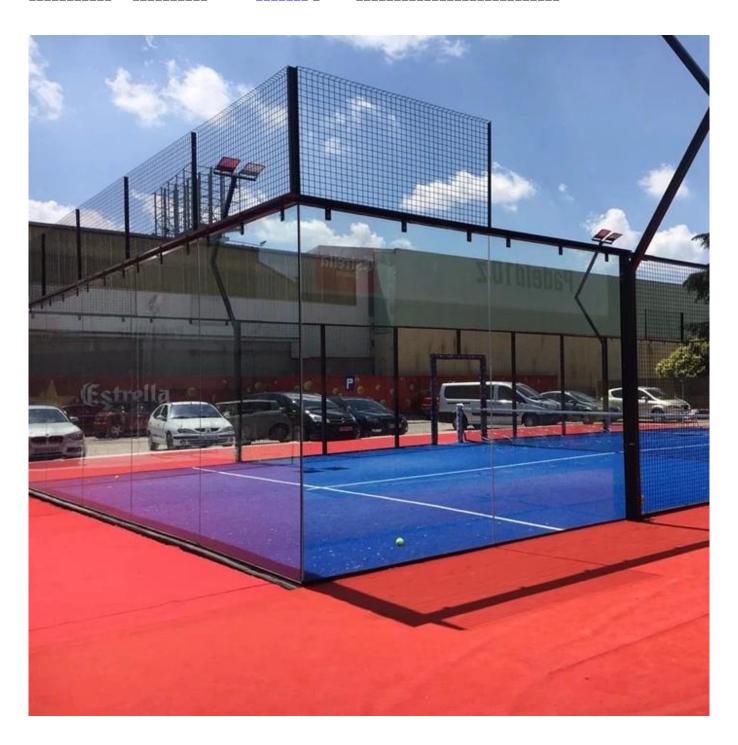

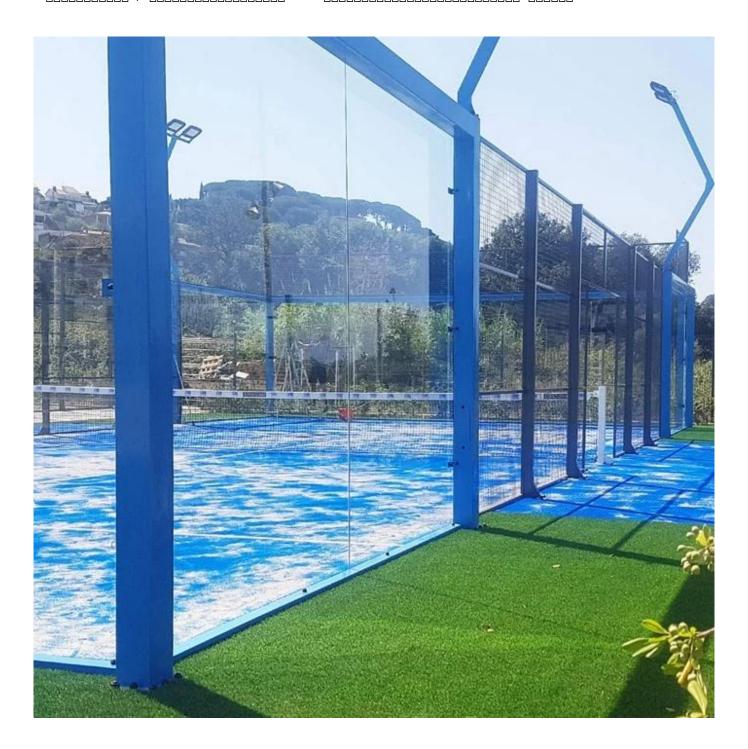

_____≥2.5X_____

□□□□≥2X□□□□□□

GlassCenter≥5X□□□□□□□□□□□□





- 1. 12mm
- 2. 12mm
- 3. 12mm Glass Standard Glass Standard
- 4. 12mm














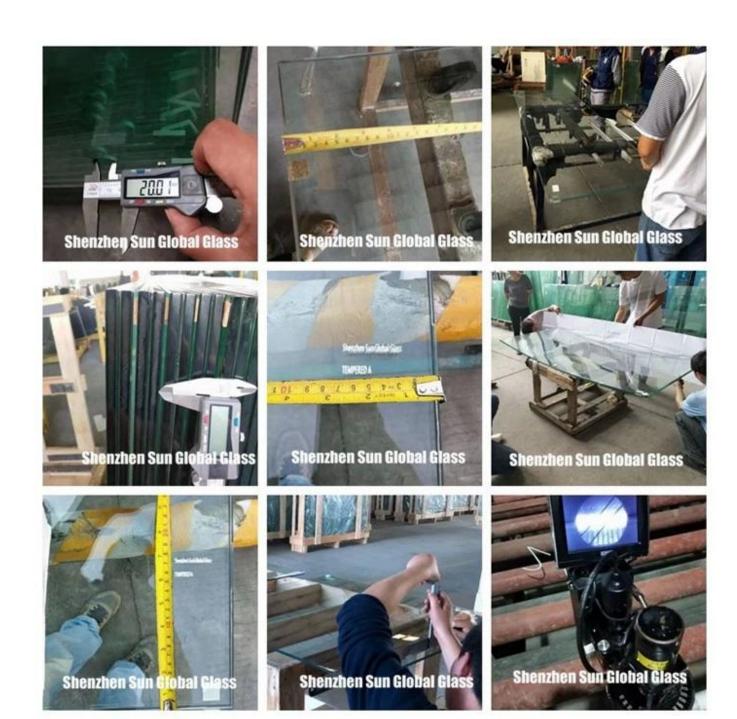







High-pressure & Cleaning



Tempering Inside Tempering Furnace

THE GLASS WALL IS MADE OF 12 MM THICK TEMPERED GLASS WITH 4 SIDES GRINDING AND POLISHING PRECISELY. THE COUNTER SUNK HOLES PUNCHED ON GLASS WHIT 8 HOLES.

TYPE: EXPLOSION-PROOF TEMPERED GLASS; SIZE 2980 X 1990 < 18 PIECES EACH COURT

CHARACTERISTIC: IMPACT RESISTANCE, THE GRAPE-SHOT BAG IMPACT PROPERTY AND FRAGMENTED FORM COMPLY WITH GB 15763.2-2005 <SAFETY GLAZING MATERIALS IN BUILDING PART 2 - TEMPERED GLASS

STANDARD:GB/T20394-2006, EN12150-1.

Complies with European standard EN12150-1







