
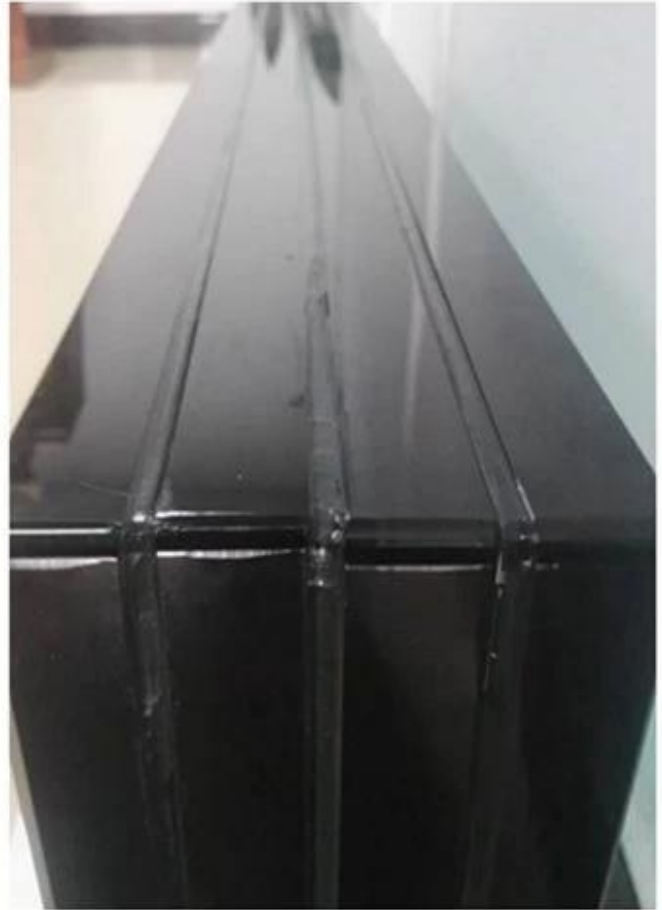


## **Excellent SGP Laminated Glass Manufacturer Offers Good Quality Glass Fin/ Glass Rib/ Glass Skywalk**

Laminated glass as known as a safety glass, because they can offer greater protection for people, due to laminated glass consists two or more glass liters permanently bonded firmly by interlayer film (that is why it also called sandwich glass), even when the breakage happened, the fragments are held by the interlayer.

Hereby, the quality of the interlayer film plays an important role. Compare to traditional PVB interlayer Laminating Glass, SGP Laminated Glass can offer a better performance, when they are under through very bad weather, such as: hurricane, storm, violence attack, bullets, etc.

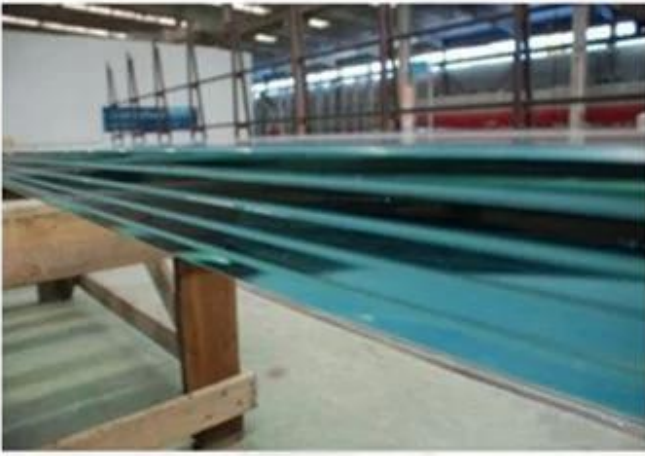

In this case 15.15.15.15.4 Heat soaked tempered ultra clear laminated glass, adopting SGP film, that can enforce the glass quality and performance. Because of [heat soaked testing](#) can make the tempered glass have more stable performance, to reduce the incidence of Toughened Tempered Low Iron Clear Glass breaking spontaneously after installation.

## Specification

- 1.Glass type: heat soaked toughened tempered laminated glass, SGP laminated glass
- 2.Glass configuration: [15mm low iron tempered glass heat soaked](#)+1.52mm SGP film+15mm low iron tempered glass heat soaked +1.52mm SGP film+15mm low iron tempered glass heat soaked+1.52mm SGP film+15mm low iron tempered glass heat soaked

3.Glass size: bespoke size, for example, 300mm\*7000mm, 3300mm\*8mm, etc.

4.Quality: European Standards EN14179, EN14449; USA Standard ANSI Z97.1-2015

## **Features:**

### **1.Safety & Protection**

the glass will not fall out if used in sloped or overhead glazing applications providing environmental protection; especially after heat soaked testing, the glass have a more stable performance, reduce the spontaneous breakage rate.

### **2.Security**

SGP tempered laminated glass can withstand more heavier impact from hurricane, storm, typhoon, violence attack etc

### **3.Aesthetic decoration**

Low iron tempered glass not only can offer high light transmittance, but also have beautiful crystal appearance.

### **4.Sound control**

## **4\*15mm Low Iron Tempered Heat Soak Laminated Glass Application:**

- HST Tempered Laminated Glass doors
- Low Iron Tempered Glass Heat Soaked Laminated Glass Fin, Glass Rib
- Heat Soaked toughened laminated glass skybridge, skywalk

## **Our advantage:**

1.Shenzhen Sun Global Glass factory can offer high quality building glass as below:

- Heat Soaked Tempered Safety Glass which meet European Standards EN14179;
- all Toughened Laminated Glass are accord with European Standard EN14449; USA Standard ANSI Z97.1-2015
- Individual [Tempered Glass](#) can meet European Standard EN12150-2;



2. Shenzhen Sun Global Glass factory is a professional DuPont Sentryglas Laminated Glass qualification fabricator in China.

3. Competitive price of multi-layer tempered laminated glass, especially for jumbo size toughened tempered laminated glass, for example: 15.15.4 the max size can up to 10 meters by 3.3 meters. Both flat tempered laminated glass and curved laminating glass are available.

4.Fast delivery time.

5.Durable, seaworthy package, to make sure the client can have good glass after long term sea transportation.

6.With over 20 years OEM fabrication experiences in this area according various requirements for different projects all over the world.

## Project Reference



**China Resources Mall**  
Low E Insulated Glass Roofing

17.52mm High Transparent Low E laminated Glass+20A+  
17.52mm Low Iron Tempered Laminated Glass, Irregular shapes, 8000m<sup>2</sup>



**Poland-PKP Gliwice Train Station Skylight project**

8+8 clear tempered laminated glass, 10000m<sup>2</sup>



**Lerato Towers**

6mm clear tempered glass,  
12mm clear tempered glass etc.  
30000m<sup>2</sup>



**Platinum Towers**

8mm crystal gray tempered glass etc. 40000m<sup>2</sup>



**Eastfield**

8+12a+8 low e insulated glass for Eastfield project. 32000m<sup>2</sup>



**Avida Towers Altura**

6mm clear tempered glass+12A+6mm euo grey tempered glass etc. 20000m<sup>2</sup>