

SZG-Glass Manufacturer-Building Glass-8mm+15mm+15mm+8mm Low Iron Tempered Laminated Glass

50.56mm anti-slip low iron laminated glass floor is produced in the same way as [normal tempered laminated glass](#). It's combined by 8mm low iron anti-slip tempered glass +1.52mm inter layer + [15mm tempered glass low iron](#)+1.52mm inter layer+15mm tempered glass low iron+1.52mm inter layer+8mm low iron tempered glass. After heating and high pressure, the four pieces of glass panels will be tightly glued together by the inter layer films. The composition of glass can be customized according to our clients requests. The main difference between ordinary laminated glass and non-slip laminated glass is that there is non-slip design on the surface of non-slip glass. So that it can increase the safety when people walk on it.


Notice

All processes such as drilling holes, polishing edge, rounding corners, cutouts, cutting notches, etc. must be finished before being tempered and then laminated.

Other types of glass floor


Clear laminated glass floor;
Colored laminated glass floor;
Frosted laminated glass floor;
Silk screen printing laminated glass floor, etc..

Product images

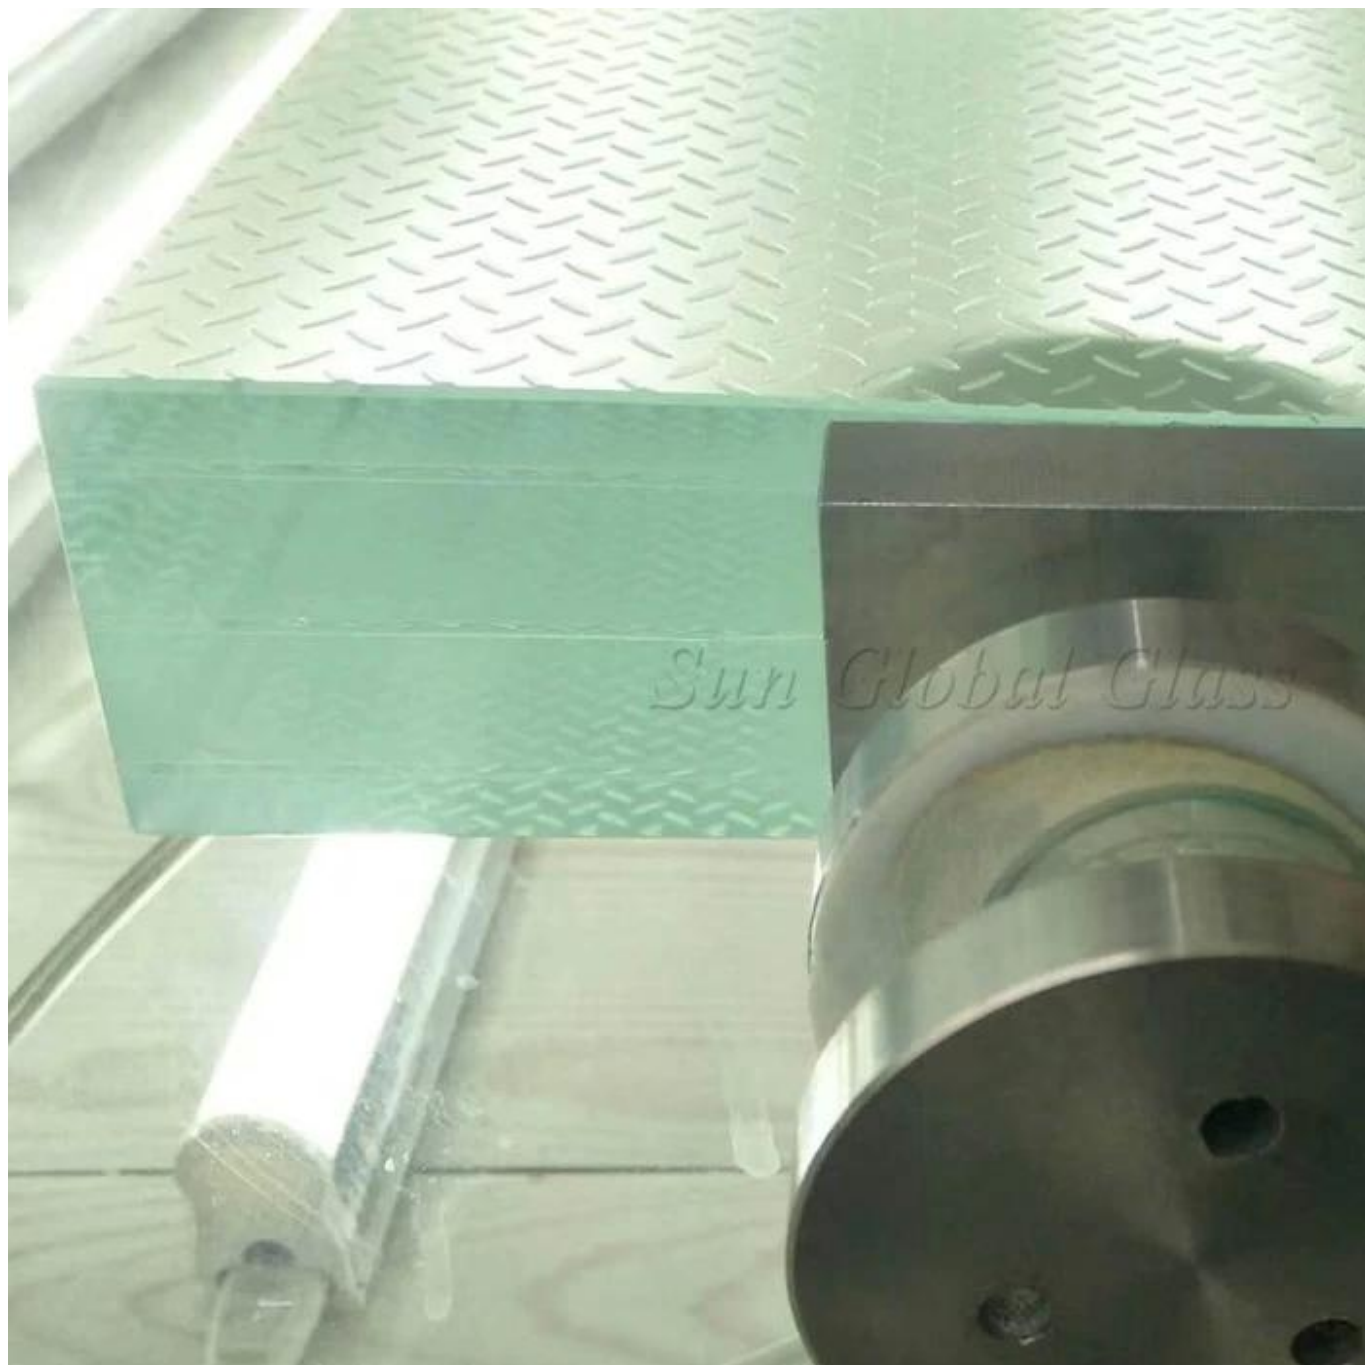



Sun Global Goods

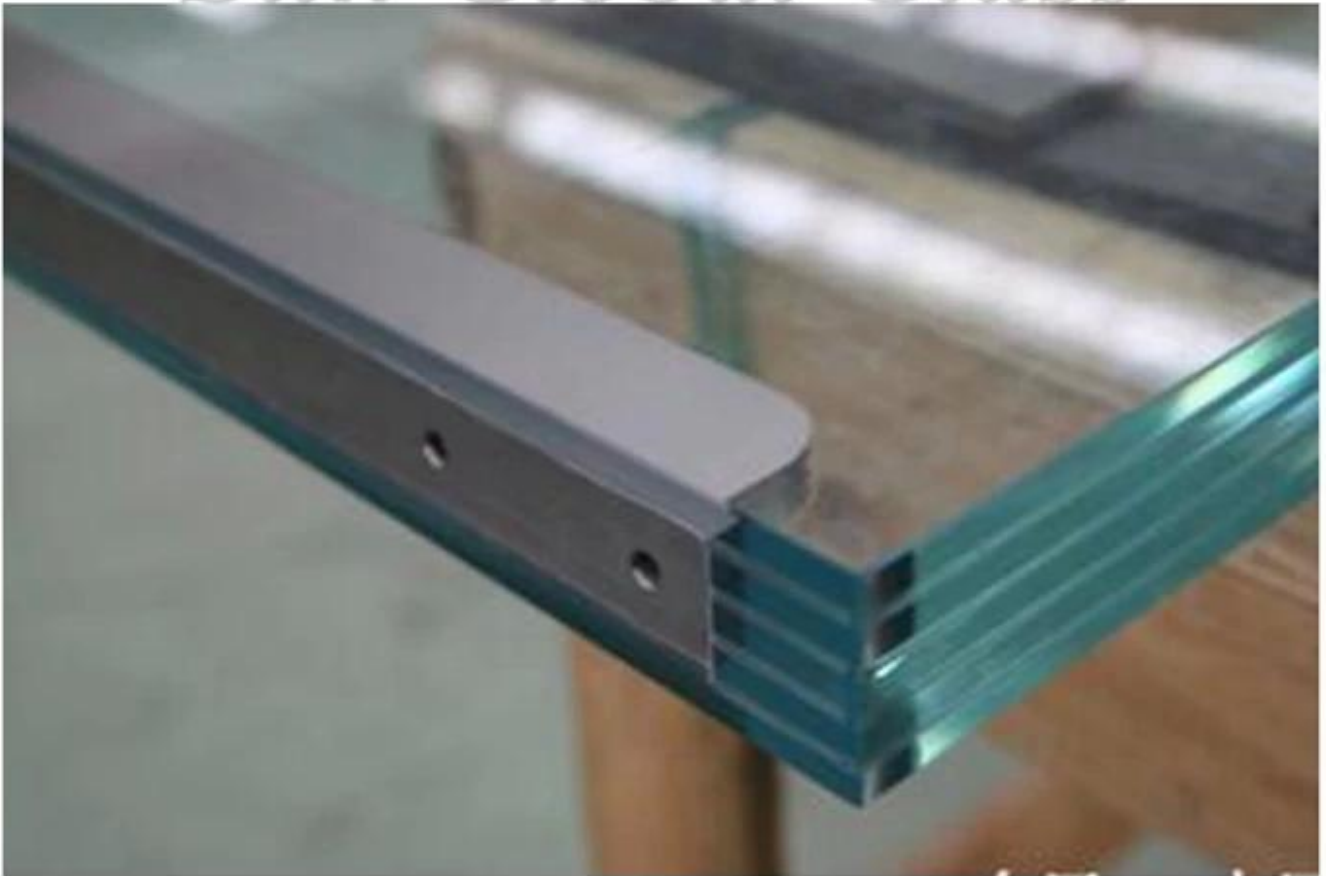

Specifications

Glass name: 50.56mm anti-slip low iron laminated glass floor

Composition: 8mm low iron anti-slip tempered glass +1.52mm inter layer + 15mm low iron tempered glass+1.52mm inter layer+15mm low iron tempered glass+1.52mm inter layer+8mm low iron tempered glass

Other name: Low iron tempered laminated glass, polylaminate laminated glass, 50.56mm tempered safety glass flooring, anti slip glass, anti slip laminated glass, 50.56mm anti slip glass floor, tempered sandwich glass, PVB laminated glass, transparent toughened laminated glass, etc..

Inter layer thickness: 0.76mm, 1.14, 1.52mm, 2.28mm, etc.

Size: Customized size.

Glass types : Low iron anti-slip laminated glass

Package: Exportation wooden crates

Delivery: 7-15 days, urgent services are available.

Container: 20'GP, 20'OT, 40'HC, etc.

Quality Guarantee

SZG - tempered laminated glass meets following standards:

1. Chinese Safety Glass Compulsory Certification (CCC) and ISO 9001.
2. BS 6206 certificate of UK safety glass standard.
3. European safety glass standard: EN EN 14449 certificate (CE).
4. USA laminated safety glass standard: SGCC certificate.

Breakage comparison between tempered glass & tempered laminated glass



annealed glass



tempered glass



tempered laminated glass

Advantages of toughened laminated glass

1. Glass floor is easy to clean, it's environmental because it can be recycled used for many times.
2. Laminated glass floor is safety. It has very strong stability and impact resistance, will not be easy to break.
3. The surface anti-slip laminated glass floor is anti-slip design, so it increase its security.
4. Glass floor has very good transmittance, it can increase the day lighting of the room and make the room looked brighter.

Applications

The 50.56mm anti-slip laminated glass can withstand heavy impacts and has very high strength, it's mainly used as the following application:

1. Laminated glass flooring;
2. Staircases, etc..



Production



S Z G

Professional glass manufacturer



Safety Packing & Loading



S Z G

Professional glass manufacturer

