

Specifications

Material: insulated glass and aluminium framed

Glass thickness: 5mm+9/16/27A+5mm

Aluminium Framed: 6063-T5 high precision titanium magnesium aluminum alloy profile


Frame width: 80mm, 90mm ,120 mm, 135mm

Aluminium Thick: 1.8mm, 2mm, 2.5mm, 3 mm

Aluminium Surface treatment: Akzonobel powder spraying, Italian heat transfer wood grain, fluorocarbon spraying color fun.

Edge line: European door cover line and arc door cover line are optional

Fixed method: Moistureproof aluminum bar+Butyl rubber

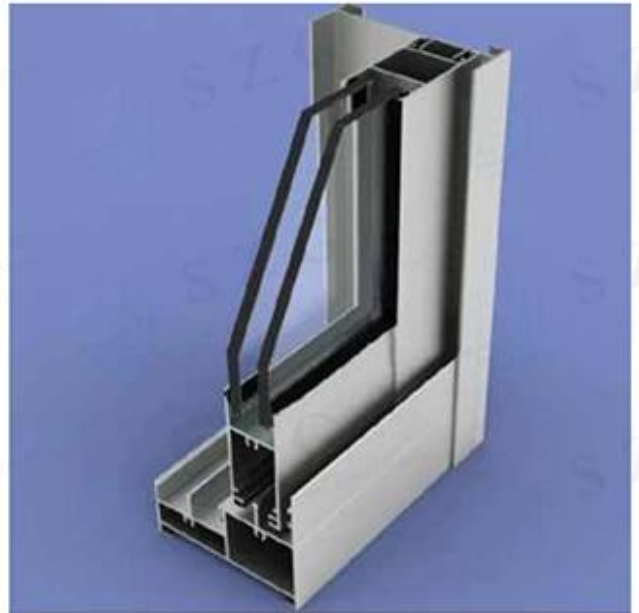

Features

Sliding Window is simple, elegant, large window frames, large glass block, wide vision, good lighting rate.

Cleaning window is convenient, flexible, safe and reliable, long use life, open in a plane.


take up less space and convenient install screens. Sliding window is the most widely to use. The disadvantage is that two panels can not be opened up together.

It is recommended that sliding windows are not used in high-rise buildings because high-rise buildings need more safety.





Open Mode

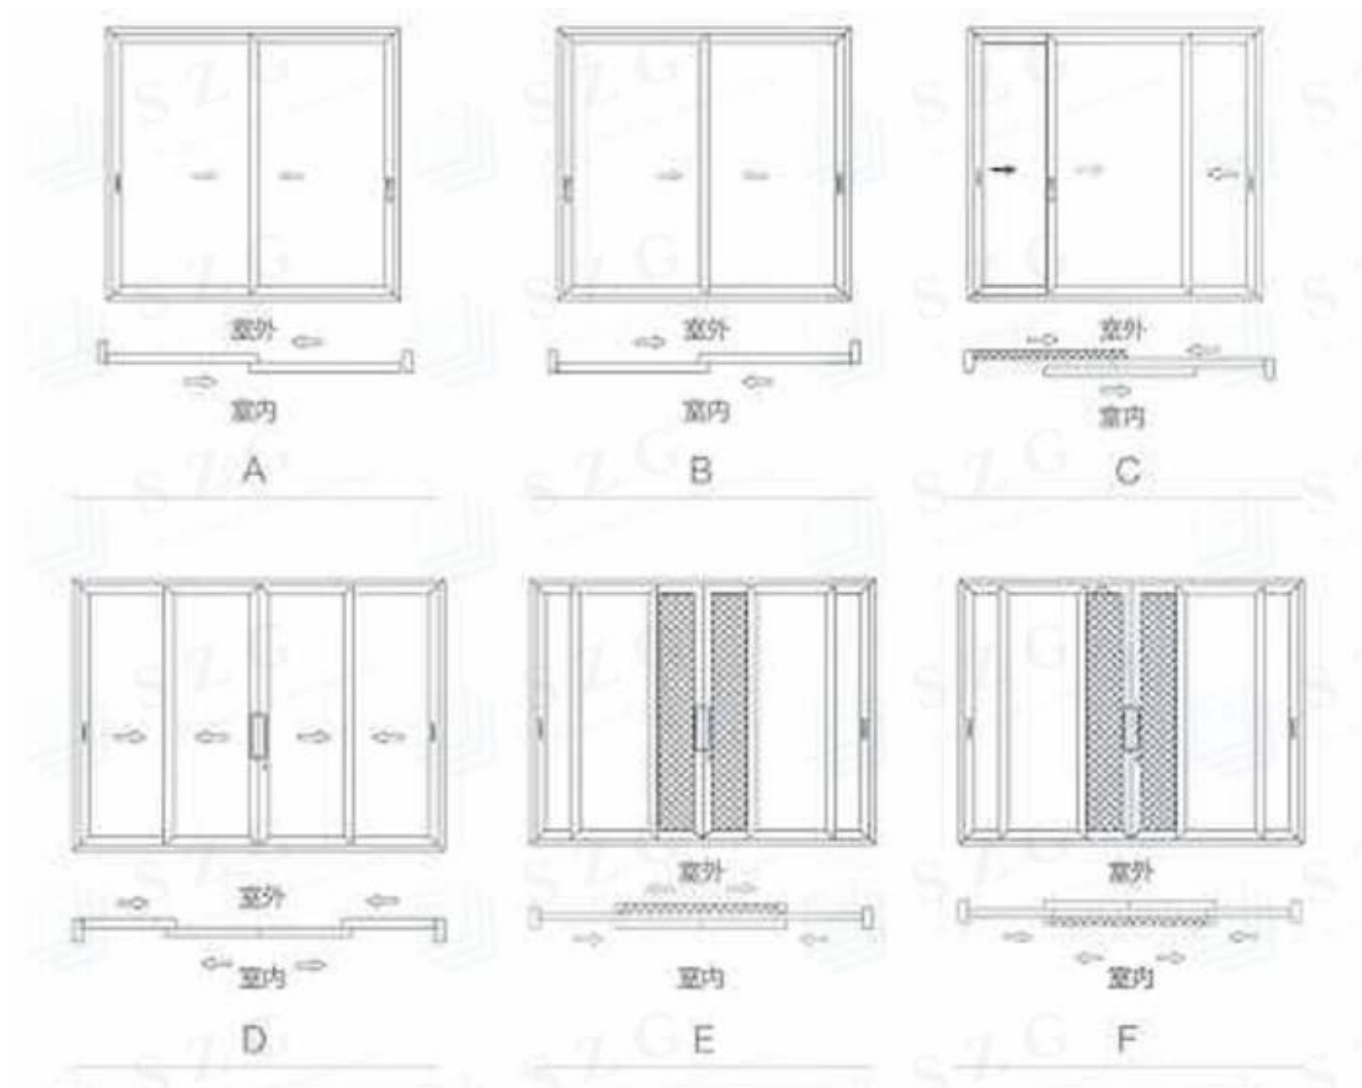

Aluminium Framed Color



Welcome to send us inquiry with your detail requirement and question.